ect	Type	Δi	im	i
aloque nº	Nate	$\overline{}$		L

# **CRPW**WEATHERPROOF COMBO RUNNING MAN

Proje Cata

The CRPW weatherproof Combo is a compact, ruggedized assembly engineered for reliable operation wet location environments. Its flame-retardant housing incorporates clean, contemporary geometries and supports adaptable universal faceplate configurations to accommodate diverse installation requirements.



# **FEATURES AND SPECIFICATIONS**

### **CIRCUITRY**

- · LED ultra bright light source
- 120/347 VAC input
- Maintenance free, 3.6V Ni-MH battery
- Wet location
- IP65
- Cold Weather temperature: -25°C to +50°C

### **MECANICAL**

- · High impact thermoplastic construction
- Universal faces
- Ceiling mount, Wall mount, End mount
- · Fully adjustable, LED heads are standard

# **APPROVALS**

CSA 22.2 No. 141

OVERVIEW			
LIGHT SOURCE	LED	DURATION	120 MINS
INPUT VOLTAGE (V AC)	120/347	LUMENS	260 LUMENS TOTAL







Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.



CRPW • REV. 2025-12-4 T 514 227-1288 TF 1 866 348-2374 aimlite.com


# **TECHNICAL SPECIFICATION TABLE**

PART NUMBER	SERIES	NBR OF FACE	NBR OF HEADS		LIGHT SOURCE	INPUT VOLTS (V AC)	COLOUR	OPTION	
5000010	CRPWUWHT-CW	UNIVERSAL	2	1	LED	120/347	WHITE	COLD WEATHER	

# **SPACING GUIDE**

	SPACING CENTER TO CENTER (FT)
8	32
10	31
15	25

# **DIMENSIONS**

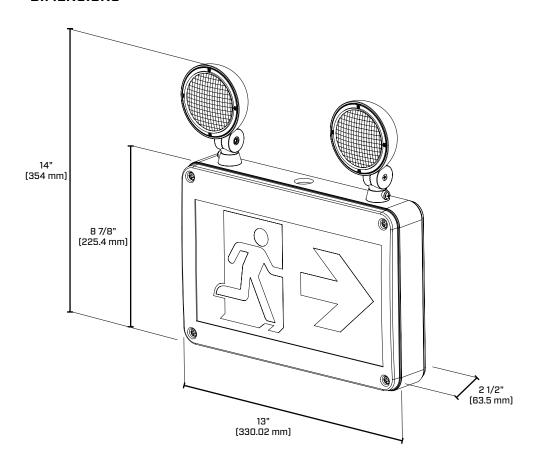

# **CONFIGURATIONS**



Comes standard with three pictogram legends for direction selection.

TF 1866 348-2374