

EBHZ HAZARDOUS LOCATION BATTERY UNIT

CLASS I, DIV 1 & 2, GROUPS C & D

CLASS II, DIV1 & 2, GROUPS F & G

CLASS III

6, 12 OR 24 V DC MODELS

120/347 V AC INPUT

Designed to meet the strictest codes and standards, the EBHZ series of hazardous location battery units provides safe and dependable operation. The EBHZ series housings are built with die cast, copper free aluminum, in a variety of Class and Division rated models. Available in 6, 12 and 24 V DC models in a range of capacities from 36 to 320 W, for 30 minutes duration.



FEATURES & SPECIFICATIONS

CIRCUITRY

- Range of input voltages 120 or 347 V AC
- Single or double internal MR16 lamp assemblies
- 6 V DC, 12 V DC or 24 V DC emergency power output versions [as specified]
- Wattage capacities from 36 to 320 W
- 30 minutes emergency power duration standard
- Diagnostic/pilot LED for AC ON
- High efficiency, rapid recovery, precision control charging system
- Brownout and short circuit protection

MECHANICAL

- Temperature compensated
- Large magnum terminal screw type connectors for remote load connection
- Maintenance free, sealed lead acid battery
- Die cast, copper free aluminum housing - grey aluminum finish
- Housing cavity accessed via large circular screw on/off cover plate
- Standard stainless steel one-way breather valve for release of gases and/or moisture condensation
- Housing c/w tapped and plugged rigid holes
- Solid state design and construction
- Oversized integral mounting holes/forks accept heavy-duty mounting hardware
- Internal MR16 lamp assembly is fully adjustable
- Temperature code: T6

APPROVALS

- CSA Certified to C22.2 #137
- CSA Certified to C22.2 #141-15
- Class I, div 1 & 2, groups C & D
- Class II, div1 & 2, groups F & G
- Class III

COMPLIANCE

- Meets requirements of ICES-005

OVERVIEW

INPUT VOLTAGE [V AC]	120 OR 347	OUTPUT POWER [W]	36 - 320
OUTPUT VOLTAGE [V DC]	6, 12 OR 24		
 HAZARDOUS LOCATION  ICES 005 			

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.

ORDERING GUIDE

EBHZ

SERIES	VOLTS [V DC]	WATTS [W]	VOLTS [V AC]	HEAD	LAMP/HEAD	LAMP
EBHZ	06 - 6 12 - 12 24 - 24	SEE MODEL RATING BELOW	BLANK - 120/347	1Z - SINGLE 2Z - DOUBLE	1 - SINGLE LAMP ASSEMBLY 2 - DOUBLE LAMP ASSEMBLY	SEE LAMP SELECTION BELOW

LAMP SELECTION

	6 V DC	12 V DC	24 V DC
MR16			
LED	4WLR, 5WLA	4WLR, 5WLA, 6WLA, 7WLA	4WLR, 5WLA, 6WLA, 7WLA

LUMEN TABLE


WATTS	LUMENS
4 W LR	388
5 W LA	435
6 W LA	507
7 W LA	652

MODEL RATINGS


WATTAGE CAPACITIES						
MODEL	ENCLOSURE	VOLTS [V DC]	30 MIN.	60 MIN.	90 MIN.	120 MIN.
EBHZ06036	A	6	36	18	12	9
EBHZ06050	A	6	50	25	16	12
EBHZ06072	A	6	72	36	24	18
EBHZ12036	A	12	36	18	12	9
EBHZ12050	A	12	50	25	16	12
EBHZ12072	A	12	72	36	24	18
EBHZ12100	A	12	100	50	33	25
EBHZ12160	B	12	160	80	53	40
EBHZ12200	B	12	200	100	66	50
EBHZ24144	A	24	144	72	48	36
EBHZ24320	B	24	320	160	106	80

DIMENSIONS

ENCLOSURE A



ENCLOSURE B

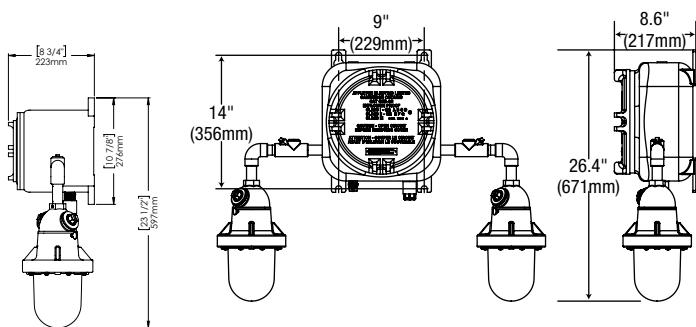

Dimensions are subject to change according to exact Class, Division & Group specifications.

All products are subject to change or may be discontinued any time without notice.

Please consult our chemical resistance guide to ensure selection of the proper product for your application.