

EBST

STEEL BATTERY UNIT



The EBST series of commercial steel battery units is designed to provide efficient and reliable emergency lighting. Utilizing a sturdy, all steel housing, the EBST presents a modern and unobtrusive design. On higher capacity models, the cabinet front is sloped to allow better internal access and superior low angle light distribution. The EBST series is available in 6 V DC, 12 V DC and 24 V DC versions in a range of wattage capacities between 18 and 720W, for 30 minutes duration.

Units are typically supplied with two top mounted PAR18, however a wide range of head type, number and placement are available including MR16 type. The EBST can also accommodate a wide variety of options, including auto-testing self-diagnostics and remote testing.

FEATURES & SPECIFICATIONS

CIRCUITRY

- 120/347 or 277 V AC 60 Hz Input
- 6 V DC, 12 V DC or 24 V DC emergency power output versions (as specified)
- Wattage capacities from 18 to 720 W
- 30 Minutes emergency power duration standard
- Momentary push button test switch
- Diagnostic/pilot LEDs for AC ON and CHARGE
- Maintenance free, sealed lead acid battery
- Optional automatic-testing, self-diagnostic charger board

BLUETOOTH CONTROL

- Integrated Bluetooth technology allows for controllable features via the Aimlite Wave App
- Controllable features include:
 - Instantly view and control individual lights and emergency devices
 - Easily group luminaires together and control them as a single unit
 - Schedule functional and discharge tests at a chosen time
 - Generate, view and share reports seamlessly with just a few clicks

MECHANICAL

- Rugged steel cabinet with ultraguard rust-coating
- 120 V AC line cord supplied standard
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Multiple conduit entry knockouts
- White powder coat finish standard, other finishes and colors optional
- Lamp heads include PAR18/MR16 small style, die cast metal MR16 type, and high output industrial type
- Top head mounting is standard, side mount is optional

COMPLIANCES

- Meets requirements of ICES-005
- CSA Certified to C22.2 #141-15

OVERVIEW

INPUT VOLTAGE [V AC]	120/347, 277
OUTPUT VOLTAGE [V DC]	6, 12, 24
OUTPUT POWER [W]	UP TO 720
  	

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

TYPICAL SPECIFICATION



TYPICAL SPECIFICATION

Supply and install Aimlite EBST. The unit shall be rated 120 V, 277 V or 347 V, 60 Hz constructed of durable 18 gauge steel and be CSA listed to C22.2 141-15 and be ICES 005 compliant. The unit shall have an output of: __V and __W and come complete with (0), (1) or (2) x __ W LED heads producing () lumens each. The charge voltage factory set to $\pm 1\%$ tolerance. High efficiency, rapid recovery, precision control charging system shall be employed to promote long battery life and reduce the potential for grid corrosion. The charger shall provide a continuous high charge to recharge the battery, when the battery is at full capacity, the charger will shut-off. Periodically the charger shall provide a pulse of energy to keep the battery at full voltage. The pulse charger shall be precisely regulated and shall charge the battery in relation to its temperature, state or charge and input voltage fluctuations. The charger shall be current limited, temperature compensated, short-circuit proof and reverse polarity protected. The unit shall be furnished with an electronic lockout circuit, which will connect the battery when the AC circuit is activated, and an electronic brownout circuit, which will activate the emergency lights when utility power dips below 75% of nominal voltage. A low voltage battery protection circuit shall be provided and will disconnect the load when the battery reaches the end of discharge. The Aimlite battery shall come complete with an auto diagnostic micro-controller board and shall supply the rated load for a minimum of a 1/2 hour to 87.5% of the rated battery voltage. The unit shall also feature integrated Bluetooth connectivity for monitoring and configuration of the system, allowing users to view system status and perform diagnostics via a mobile app. The Aimlite battery unit shall come complete with the Auto Test function. The automated testing performed by the Aimlite auto test system has been designed to comply with all of the requirements of the National Fire Code. Every month a 5 minute discharge and diagnostic test checks the operational status of the unit. Every 12 months, this test is extended to the full 30 minute, code required duration. This ensures that the battery charger is recharging the battery in accordance with code requirements. The unit shall be Aimlite model: _____

QUICK SHIP ORDERING GUIDE



PART NUMBER	DC VOLTS (V DC)	WATTS (W)	NBR OF HEADS	HEAD	LAMP (W)	LIGHT SOURCE	INPUT VOLTS (V AC)	COLOR
EBST-1L	6	27	2	SM	2	LED	120/347	WHITE
EBST-2L	6	36	2	SM	2	LED	120/347	WHITE
EBST-3L	6	36	2	SM	3	LED	120/347	WHITE
EBST12-2L	12	72	2	SM	2.5	LED	120/347	WHITE
EBST06036-2SM09T	6	36	2	SM	9	TUNGSTEN	120/347	WHITE
EBST06072-2SM09T	6	72	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12036-2SM09T	12	72	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12072-2SM09T	12	72	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12100-2SM09T	12	100	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12160-2SM09T	12	160	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12200-2SM09T	12	200	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12250-2SM09T	12	250	2	SM	9	TUNGSTEN	120/347	WHITE
EBST12360-2SM09T	12	360	2	SM	9	TUNGSTEN	120/347	WHITE

ORDERING GUIDE

EBST

—

/

SERIES	VOLTS (V DC)	WATTS	HEAD/LAMP	LAMP TYPE	COLOR	INPUT VOLTAGE (V AC)	OPTIONS
EBST	06 - 6 12 - 12 24 - 24	SEE MODEL RATING BELOW	0 - NO HEADS 1SM - ONE PAR18/MR16 2SM - TWO PAR18/MR16 3SM - THREE PAR18/MR16 1MD - ONE MR16 2MD - TWO MR16 3MD - THREE MR16 1MB - ONE MR16 2MB - TWO MR16 3MB - THREE MR16 1HO - ONE INDUSTRIAL 2HO - TWO INDUSTRIAL	SEE LAMP LIST BELOW	WHT - WHITE (STANDARD) BLK - BLACK GRY - GREY	BLANK - 120/347 277 - 277	AMP, ACT, ATD, AUD ¹ , AUE, BTD, DCT, FS6, RMT, K5, LPD, NLC, RDS, TDL, TLP ² , VDR, VLT, BT (BLUETOOTH WAVE OPTION)

Note : Due to cabinet/space limitations, not all options are available for all models in any given combination. Please consult with your factory representative regarding specific options and exact cabinet dimension information.

¹ Only available with ATD and BT.

² Only available in 120 VAC.

OPTIONS

DESCRIPTION		DESCRIPTION	
AMP	AMMETER	K5	1/2" KNOCKOUT FOR PENDANT MOUNT
ACT¹	AC TERMINAL BLOCK (LINE CORD DELETE)	LPD	LAMP DISCONNECT (INTERNAL)
ATD²	AUTOMATIC TEST SELF-DIAGNOSTIC	NLC	OCTAGON BOX MOUNT (LINE CORD DELETE)
AUD³	AUDIBLE ALARM	RDS	RADIO FREQUENCY SUPPRESSION
AUE	AUDIBLE EMERGENCY	TDL	TIME DELAY
BTD	BATTERY DISCONNECT	TLP¹	TWIST LOCK PLUG
DCT	DC TERMINAL BLOCK	VDR	TAMPER PROOF SCREWS
FS6	6 CIRCUIT FUSED INTERNAL DISTRIBUTION	VLT	VOLTMETER
RMT	INFRARED REMOTE TEST		

¹ ACT & TLP are incompatible together.

² ATD features may overlap with the following options: VLT, TDL, AMP & RDS. Contact customer service for more information.

³ Only available with ATD and BT.

SMART OPTION

DESCRIPTION	
BT	WAVE BLUETOOTH

WIREGUARD

		PART NUMBER	DIMENSIONS (IN)
WITHOUT HEAD	CABINET 1	WGD520-V2	15.75 x 11.5 x 4.5
	CABINET 2	WGD520-V2	15.75 x 11.5 x 4.5
	CABINET 3	WGD590-V2	16.75 x 17.75 x 6.5
	CABINET 4	WGD650-V2	17.75 x 17.75 x 16.50
	CABINET 5	WGD600-V2	23 x 20 x 12
WITH HEAD(S) ¹	CABINET 1	WGD590-V2	16.75 x 17.75 x 6.5
	CABINET 2	WGD590-V2	16.75 x 17.75 x 6.5
	CABINET 3	WGD590-V2	16.75 x 17.75 x 6.5
	CABINET 4	WGD650-V2	17.75 x 17.75 x 16.50
	CABINET 5	WGD600-V2	23 x 20 x 12

¹ For HQ heads, please contact your customer service representative for more information.

LUMEN TABLE

WATTS	LUMENS
3W LJ	313
4W LJ	388
5W LJ	590
4W LR	388
5W LA	435
6W LA	507
7W LA	652

LEXAN GUARD

MOUNTING TYPE	NUMBER OF HEADS	INPUT VOLTAGE	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	1,2	12V036W	PGD107	14.5x11.25x5.5
		12V050W	PGD107	14.5x11.25x5.5
		12V072W	PGD107	14.5x11.25x5.5
		12V160W	PGD111	19.75x14x8
		12V200W	PGD111	19.75x14x8
		24V144W	PGD111	19.75x14x8
		24V200W	PGD111	19.75x14x8

MOUNTING TYPE	NUMBER OF HEADS	INPUT VOLTAGE	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	0	06V018W	PGD107	14.5x11.25x5.5
		06V036W	PGD107	14.5x11.25x5.5
		06V050W	PGD107	14.5x11.25x5.5
		06V072W	PGD107	14.5x11.25x5.5
		06V100W	PGD107	14.5x11.25x5.5
		06V160W	PGD107	14.5x11.25x5.5
		06V180W	PGD107	14.5x11.25x5.5
		12V036W	PGD107	14.5x11.25x5.5
		12V050W	PGD107	14.5x11.25x5.5
		12V072W	PGD107	14.5x11.25x5.5
		12V100W	PGD107	14.5x11.25x5.5
		12V144W	PGD107	14.5x11.25x5.5
		12V160W	PGD107	14.5x11.25x5.5
		12V200W	PGD107	14.5x11.25x5.5
		24V144W	PGD107	14.5x11.25x5.5
		24V200W	PGD107	14.5x11.25x5.5

LAMP SELECTION

6 VOLTS		12 VOLTS		24 VOLTS	
PAR18 • SMALL HEAD OR LED LAMP					
LED	3WLJ, 4WLJ, 5WLJ	3WLJ, 4WLJ, 5WLJ, 6WLA, 7WLA		4WLR, 5WLA, 6WLA, 7WLA	
TUNGSTEN	09WT	09WT		09WT	
MR16 • SMALL HEAD C/W MR16 OR LED LAMP					
LED	4WLR, 5WLA	4WLR, 5WLA, 6WLA, 7WLA		4WLR, 5WLA, 6WLA, 7WLA	
INDUSTRIAL					
LED		5WLJ, 9WLJ, 14WLJ, 30WLJ		5WLJ, 9WLJ, 14WLJ, 30WLJ	

Note: Due to cabinet/space limitations, not all options are available for all models in any given combination. Please consult with your factory representative regarding specific options and exact cabinet dimension information.


MODEL RATINGS

WATTAGE CAPACITIES [W] ²						
MODEL	VOLTS [V]	30 MIN.	60 MIN.	90 MIN.	120 MIN.	CABINET ¹
EBST06018	6	18	18	12	10	1
EBST06036	6	36	18	12	9	1
EBST06050	6	50	25	16	12	1
EBST06072	6	72	36	24	18	2
EBST06100	6	100	50	33	25	2
EBST06160	6	160	80	53	40	3
EBST06180	6	180	126	87	72	3
EBST12036	12	36	36	24	20	1
EBST12050	12	50	36	24	20	1
EBST12072	12	72	36	24	18	1
EBST12100	12	100	50	33	25	2
EBST12144	12	144	84	48	36	3
EBST12160	12	160	80	53	40	3
EBST12200	12	200	100	66	50	3
EBST12250	12	250	219	169	136	4
EBST12360	12	360	233	164	144	4
EBST24144	24	144	72	48	36	3
EBST24200	24	200	100	66	50	4
EBST24320	24	320	160	106	80	4
EBST24350	24	350	175	116	88	5
EBST24550	24	550	438	338	272	5
EBST24720	24	720	466	328	288	5

¹ The size of the cabinet might change depending of the chosen options.


Please consult with your factory representative regarding exact cabinet dimension information.

² It is recommended to load battery pack 20% under their maximum load.

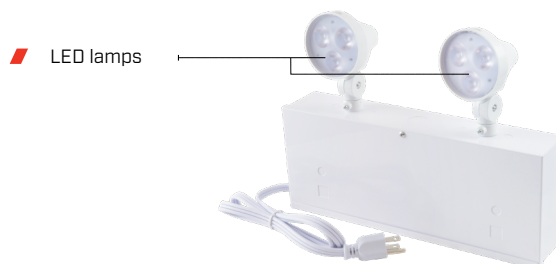


DIMENSIONS


CABINET TYPE 1

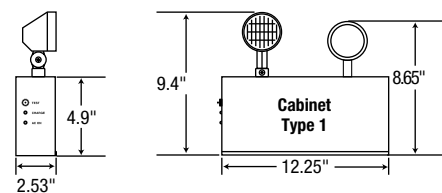


CABINET TYPE 2

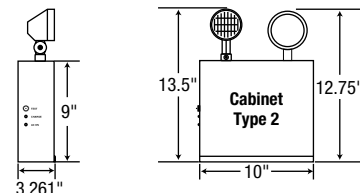


CABINET TYPE 3

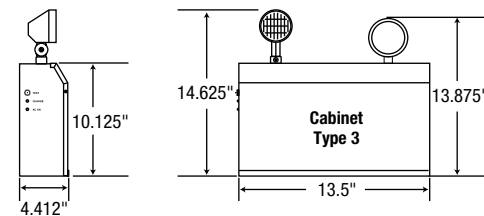

CABINET TYPE 4

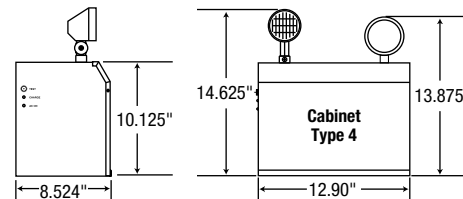


CABINET TYPE 5

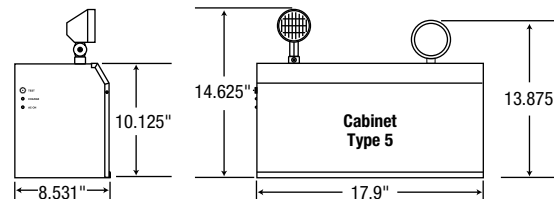


TYPE SM - PAR18

Thermoplastic




TYPE MD - MR16

Die cast




TYPE MB - MR16

Die cast



TYPE HO - INDUSTRIAL


Die cast



PHOTOMETRIC DATA¹

PAR18-06-12V3WLJ • 309.0 LM

POLAR CANDELA DISTRIBUTION

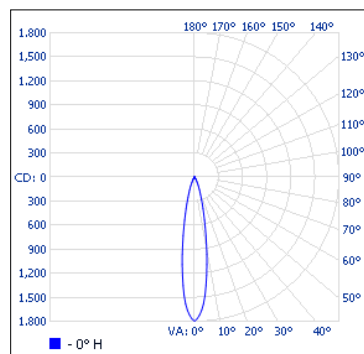

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	282.9	91.6
0-40	297.5	96.3
0-60	306.9	99.3
60-90	2.1	0.7
70-100	0.3	0.1
90-120	0	0
0-90	309.0	100
90-180	0	0
0-180	309.0	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC	BEAM WIDTH
1.7'	0.6'
3.3'	1.1'
5.0'	1.7'
6.7'	2.3'
8.3'	2.8'
10.0'	3.4'

■ Beam. Spread: 19.3°

PAR18-06-12V4WLJ • 429.5 LM

POLAR CANDELA DISTRIBUTION

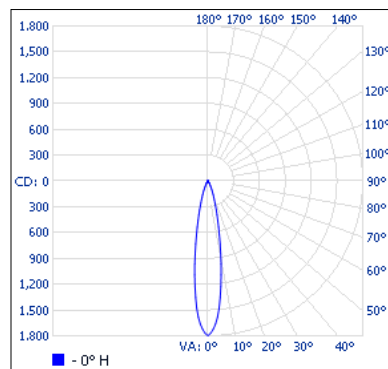

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	325.3	75.7
0-40	369.4	86
0-60	410.4	95.5
60-90	19.2	4.5
0-90	429.5	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC	BEAM WIDTH
1.7'	0.8' 8.2'
3.3'	1.6' 16.4'
5.0'	2.4' 24.6'
6.7'	3.2' 32.8'
8.3'	3.9' 41.0'
10.0'	4.7' 49.2'

■ Vert. Spread: 26.6° ■ Hor. Spread: 27.1°

PAR18-06-12V5WLJ • 655.3 LM

POLAR CANDELA DISTRIBUTION

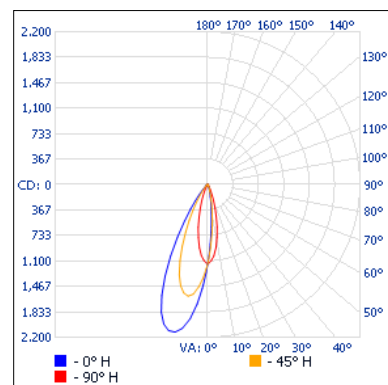

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	515.6	78.7
0-40	595.7	90.9
0-60	637.2	97.2
60-90	18.0	2.8
0-90	655.3	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC	BEAM WIDTH
1.7'	0.9' 0.9'
3.3'	1.7' 1.7'
5.0'	2.5' 2.6'
6.7'	3.4' 3.5'
8.3'	4.2' 4.3'
10.0'	5.1' 5.2'


■ Vert. Spread: 28.6° ■ Hor. Spread: 29.4°

¹ Complete IES files available on our website.

PHOTOMETRIC DATA¹

MR16-06-24V4WLR • 228.7 LM


POLAR CANDELA DISTRIBUTION

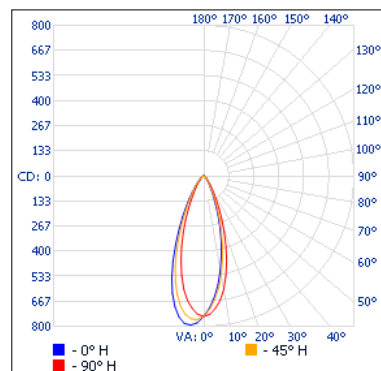

ZONAL LUMEN SUMMARY


ZONE	LUMENS	% FIXTURE
0-30	164.4	71.9
0-40	182.0	79.6
0-60	214.8	93.9
60-90	13.9	6.1
70-100	4.1	1.8
90-120	0	0
0-90	228.7	100
90-180	0	0
0-180	228.7	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC			BEAM WIDTH	
1.7'	168		1.1'	
3.3'	44.5		2.1'	
5.0'	19.4		3.2'	
6.7'	10.8		4.3'	
8.3'	7.04		5.3'	
10.0'	4.85		6.4'	
■ Beam. Spread: 35.4°				

MR16-06-24V5WLA • 440.7 LM

POLAR CANDELA DISTRIBUTION

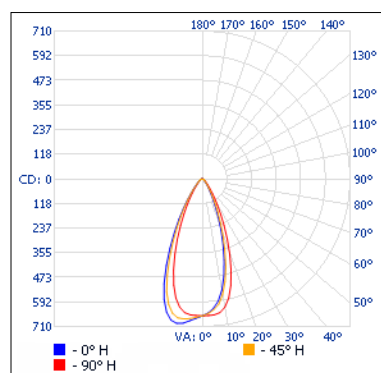

ZONAL LUMEN SUMMARY


ZONE	LUMENS	% FIXTURE
0-30	352.6	80
0-40	391.8	88.9
0-60	427.2	96.9
60-90	13.5	3.1
70-100	4.3	1
90-120	0	0
0-90	440.7	100
90-180	0	0
0-180	440.7	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC			BEAM WIDTH	
1.7'	407		0.9'	1.0'
3.3'	108		1.7'	1.9'
5.0'	47.0		2.6'	2.8'
6.7'	26.2		3.5'	3.8'
8.3'	17.1		4.3'	4.7'
10.0'	11.8		5.2'	5.7'
■ Vert. Spread: 29.3° ■ Hor. Spread: 31.7°				

MR16-12-24V6WLA • 508.7 LM

POLAR CANDELA DISTRIBUTION

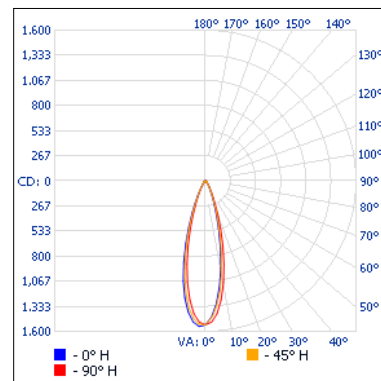

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	407.0	80
0-40	452.3	88.9
0-60	493.1	96.9
60-90	15.6	3.1
70-100	4.9	1
90-120	0	0
0-90	508.7	100
90-180	0	0
0-180	508.7	100

ILLUMINANCE AT A DISTANCE


CENTER BEAM FC			BEAM WIDTH	
1.7'	470		0.9'	1.0'
3.3'	125		1.7'	1.9'
5.0'	54.3		2.6'	2.8'
6.7'	30.2		3.5'	3.8'
8.3'	19.7		4.3'	4.7'
10.0'	13.6		5.2'	5.7'
■ Vert. Spread: 29.3° ■ Hor. Spread: 31.7°				

¹ Complete IES files available on our website.

PHOTOMETRIC DATA¹

MR16-12-24V7WLA • 635.2 LM

POLAR CANDELA DISTRIBUTION

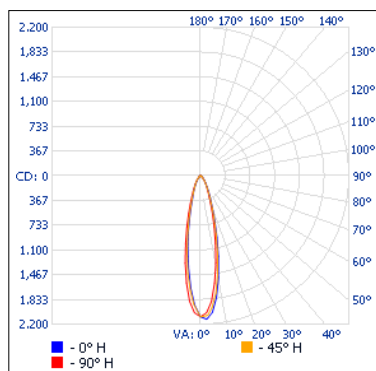

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	508.2	80
0-40	564.7	88.9
0-60	615.7	96.9
60-90	19.5	3.1
70-100	6.1	1
90-120	0	0
0-90	635.2	100
90-180	0	0
0-180	635.2	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
1.7'	587	0.9'	1.0'
3.3'	156	1.7'	1.9'
5.0'	67.8	2.6'	2.8'
6.7'	37.8	3.5'	3.8'
8.3'	24.6	4.3'	4.7'
10.0'	16.9	16.9'	5.7'

■ Vert. Spread: 29.3° ■ Hor. Spread: 31.7°

SQ-12V-5W • 642.1 LM

POLAR CANDELA DISTRIBUTION

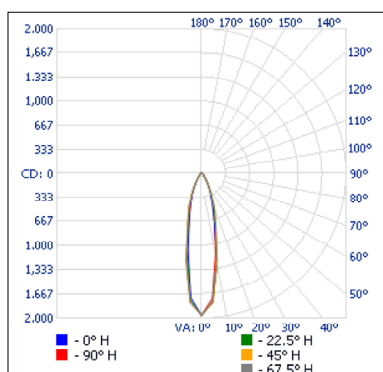

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	481.0	74.9
0-40	548.2	85.4
0-60	611.0	95.1
60-90	31.1	4.8
70-100	12.2	1.9
90-120	0.0	0
0-90	642.1	100
90-180	0.1	0
0-180	642.1	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	489.9	0.8'	0.8'
4.0'	122.5	1.7'	1.7'
6.0'	54.4	2.5'	2.5'
8.0'	30.6	3.3'	3.4'
10.0'	19.6	4.1'	4.2'

■ Vert. Spread: 23.4° ■ Hor. Spread: 23.8°

SQ-12V-9W • 1 105.1 LM

POLAR CANDELA DISTRIBUTION

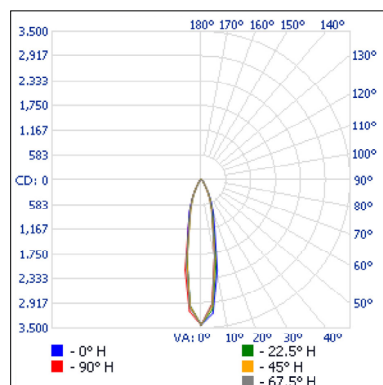

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	835.2	75.6
0-40	948.6	85.8
0-60	1 051.8	95.2
60-90	53.1	4.8
70-100	20.9	1.9
90-120	0.1	0
0-90	1 104.9	100
90-180	0.2	0
0-180	1 105.1	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	856.3	0.8'	0.8'
4.0'	214.1	1.7'	1.6'
6.0'	95.1	2.5'	2.4'
8.0'	53.5	3.4'	3.2'
10.0'	34.3	4.2'	4.1'


■ Vert. Spread: 23.8° ■ Hor. Spread: 22.9°

¹ Complete IES files available on our website.

PHOTOMETRIC DATA¹

SQ-12V-14W • 1 460.7 LM

POLAR CANDELA DISTRIBUTION

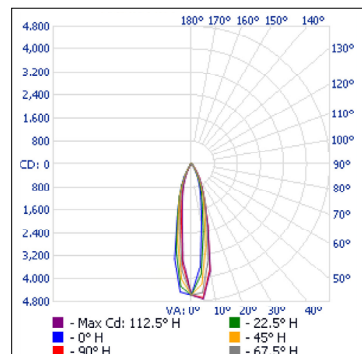

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	1 142.6	78.2
0-40	1 289.7	88.3
0-60	1 407.8	96.4
60-90	52.7	3.6
70-100	18.7	1.3
90-120	0.0	0
0-90	1 460.6	100
90-180	0.1	0
0-180	1 460.7	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	1 143.8	0.8'	0.8'
4.0'	285.9	1.6'	1.7'
6.0'	127.1	2.4'	2.5'
8.0'	71.5	3.2'	3.3'
10.0'	45.8	4.0'	4.2'

■ Vert. Spread: 22.6° ■ Hor. Spread: 23.5°

SQ-24V-5W • 659.0 LM

POLAR CANDELA DISTRIBUTION

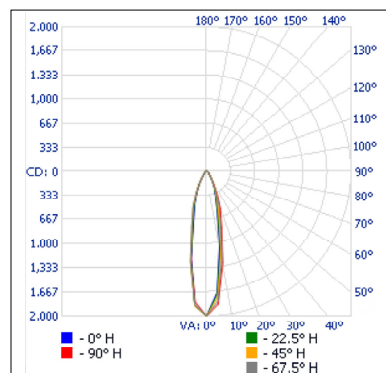

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	493.6	74.9
0-40	562.7	85.4
0-60	627.1	95.2
60-90	31.8	4.8
70-100	12.4	1.9
90-120	0.0	0
0-90	658.9	100
90-180	0.1	0
0-180	659.0	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	499.7	0.8'	0.9'
4.0'	124.9	1.6'	1.8'
6.0'	55.5	2.4'	2.7'
8.0'	31.2	3.2'	3.6'
10.0'	20.0	4.0'	4.5'

■ Vert. Spread: 22.6° ■ Hor. Spread: 25.3°

SQ-24V-9W • 1 114.7 LM

POLAR CANDELA DISTRIBUTION

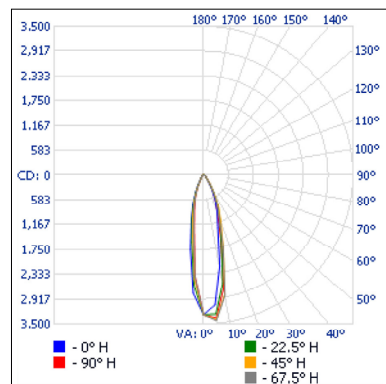

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	835.1	74.9
0-40	954.7	85.7
0-60	1 060.8	95.2
60-90	53.8	4.8
70-100	21.1	1.9
90-120	0.1	0
0-90	1 114.6	100
90-180	0.1	0
0-180	1 114.7	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	820.9	0.9'	0.8'
4.0'	205.2	1.7'	1.6'
6.0'	91.2	2.6'	2.4'
8.0'	51.3	3.5'	3.2'
10.0'	32.8	4.4'	4.0'


■ Vert. Spread: 24.5° ■ Hor. Spread: 22.6°

¹ Complete IES files available on our website.

PHOTOMETRIC DATA¹

SQ-24V-14W • 1 487.4 LM

POLAR CANDELA DISTRIBUTION

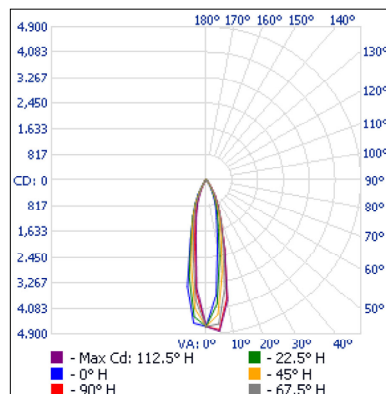

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	1 164.1	78.3
0-40	1 313.4	88.3
0-60	1 433.6	96.4
60-90	53.7	3.6
70-100	19.1	1.3
90-120	0.0	0
0-90	1 487.3	100
90-180	0.1	0
0-180	1 487.4	100


ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
2.0'	1 166.4	0.8'	0.8'
4.0'	291.6	1.6'	1.7'
6.0'	129.6	2.4'	2.5'
8.0'	72.9	3.2'	3.3'
10.0'	46.7	4.0'	4.2'

■ Vert. Spread: 22.8° ■ Hor. Spread: 23.5°

SQ-12-24V-30W • 2 578 LM

POLAR CANDELA DISTRIBUTION

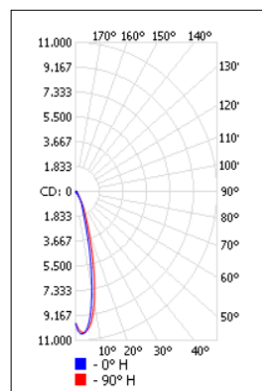

ZONAL LUMEN SUMMARY

ZONE	LUMENS	% FIXTURE
0-30	2 112.3	82
0-40	2 315.1	90
0-60	2 491.9	97
60-90	83.7	3
0-90	2 575.7	100

ILLUMINANCE AT A DISTANCE

CENTER BEAM FC		BEAM WIDTH	
17.0'	33.7	6.1'	6.3'
34.0'	8.42	12.1'	12.5'
51.0'	3.47	18.2'	18.8'
68.0'	2.10	24.3'	25.1'
85.0'	1.35	30.4'	31.3'
102.0'	0.94	36.4'	37.6'

■ Vert. Spread: 20.3° ■ Hor. Spread: 20.9°

¹ Complete IES files available on our website.