

RPDB DIE-CAST ALUMINUM RUNNING MAN SIGNM

RPDB series of commercial decorative die cast aluminum exit signs are the perfect match of aesthetics and durability. The die cast construction produces an extremely rigid housing while the highly machined brushed housing lends a high-end look. The series has been designed to meet the C860 standard using energy efficient LEDs, with energy consumption as low as 1.9 W AC. Faceplates are hinged and snap into place for ease of installation.



FEATURES & SPECIFICATIONS

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V CA input voltage, field selectable
- 1.9 W power consumption single, double face
- Emergency DC Wattages as follows:
 6 V DC = 0.9 W
 12 V DC = 0.9 W
 24 V DC = 0.9 W

CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347 V CA input voltage, field selectable
- 2 W power consumption single, double face
- High-performance, sealed Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger

MECHANICAL




- Die cast aluminum, rigid housing construction
- Faceplates are hinged and snap into place for ease of installation
- Universal faces
- Universal spider knockout pattern stamped into back plate for junction box mounting
- Universal models include ceiling or end mount, field installable canopy kit
- Other colours are available

COMPLIANCE

- Meets requirements of ICES-005

APPROVALS

- CSA Certified to C22.2 #141-15 and C860

OVERVIEW			
LIGHT SOURCE	LED	INPUT VOLTAGE [V CA]	120/347
INPUT POWER	1.9 W AC & AC/DC single or double face 2 W self-powered single or double face	DC VOLTAGE [V DC]	6, 12, 24
DC POWER [W]	0.9		
 LED  ICES 005  SP® <small>Energy Verified Energie Verifiée</small>			

For complete warranty details, please see our terms and conditions on our website.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

TYPICAL SPECIFICATION



TYPICAL SPECIFICATION

Supply and install Aimlite RPDB Series, Die Cast Aluminum Running Man Exit Signs. The sign shall operate with AC/DC field selectable 120/347 V AC Input, field selectable Emergency DC voltage as follows 6 V 0.9 W, 12 V 0.9 W, 24 V DC 0.9 W. The Self powered configuration shall be AC field selectable 120/347v and consist of a long lasting Nickel-Cadmium battery and shall stay illuminated for a minimum of 120 minutes upon AC failure. The face shall be illuminated by using Nichia LED ultra-bright light source. The sign shall be suitable for wall, end, or ceiling mount and come complete with 3 Running Man fibers for universal direction. The frame and back plate shall each be of a one-piece die cast aluminum construction. The Exit Running Man Sign shall be CSA 22.2 No.141-15 certified, ICES 005 compliant and be Aimlite model number RPDB_____.

ORDERING GUIDE

SERIES	NBR OF FACES	COLOR	DC VOLTAGE	OPTIONS
RPDB	1 - SINGLE FACE 2 - DOUBLE FACE 0 - UNIVERSAL FACE	BLANK -BRUSHED ALUMINUM FACE / BLACK BODY WHT -WHITE BLK -BLACK BSH -BRUSHED ALUMINUM	UNVDC - UNIVERSAL DC BACKUP VOLTAGE BAT1 - SELF-POWERED FOR 120 MINUTES	ATD ¹ - AUTOMATIC TEST SELF-DIAGNOSTIC

¹ ATD available with BAT1.

WIREGUARD¹

	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	WGD520-V2	15.75 X 11.5 X 4.5
CEILING MOUNT	WGD540-V2	18.25X9.75X10.5
END MOUNT	WGD650-V2	17.75 X 17.75 X 16.50

¹ Please contact your AimLite customer service representative for more information.


LEXAN GUARD

	PART NUMBER	DIMENSIONS (IN)
WALL MOUNT	PGD109	14 X 9.75 X 3.5
CEILING MOUNT	PGD110	14 X 5.75 X 10
END MOUNT	PGD106	5.5 X 9.25 X 18.5

FIBERS

MODEL NUMBER	DESCRIPTION
FIBER-Q-DB-0	RUNNING MAN NO ARROW
FIBER-Q-DB-L	RUNNING MAN ARROW LEFT
FIBER-Q-DB-R	RUNNING MAN ARROW RIGHT
FIBER-Q-DB-U	RUNNING MAN ARROW UP
FIBER-Q-DB-D	RUNNING MAN ARROW DOWN
FIBER-Q-DB-LU	RUNNING MAN ARROW UP LEFT
FIBER-Q-DB-RU	RUNNING MAN ARROW UP RIGHT
FIBER-Q-DB-LD	RUNNING MAN ARROW DOWN LEFT
FIBER-Q-DB-RD	RUNNING MAN ARROW DOWN RIGHT

DIMENSIONS

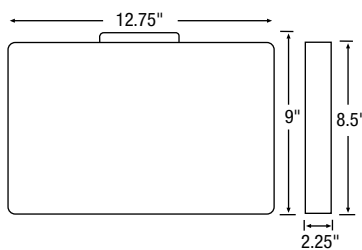

CONFIGURATIONS



Comes standard (single face) with three pictogram legends for direction selection.



Comes standard (double face) with two pictogram legends.

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.