

RPW

WEATHERPROOF RUNNING MAN SIGN

The RPW weatherproof running man sign is a compact, robust unit engineered to deliver reliable operation in wet-location environments. Its enclosure incorporates smooth, modern contours with adaptable universal face configurations for any installation.



FEATURES AND SPECIFICATIONS

CIRCUITRY

- 120/347 VAC input
- 120 minutes emergency duration
- Maintenance free, 3.6V Ni-cad battery
- Wet location
- IP65
- Cold Weather temperature: -25°C to +50°C

MECHANICAL

- High impact thermoplastic construction
- Universal faces
- Ceiling mount, Wall mount, End mount

APPROVALS

- CSA 22.2 No. 141


| OVERVIEW | | | |
|---|--|---------|----------|
| LIGHT SOURCE | | LED | DURATION |
| | | | 120 MINS |
| INPUT VOLTAGE [V AC] | | 120/347 | |
| <div><div><div><div>65</div><div>IP</div></div><div>IP RATING</div></div><div><div><div></div><div></div></div><div>WET LOCATION</div></div><div><div>CSA</div><div>®</div></div></div> | | | |

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
 All products are subject to change or may be discontinued any time without notice.

TECHNICAL SPECIFICATION TABLE

| PART NUMBER | SERIES | NBR OF FACE | LIGHT SOURCE | INPUT VOLTS (V AC) | COLOUR | OPTION |
|-------------|-----------------|-------------|--------------|--------------------|--------|--------------|
| 5000008 | RPWUWHT-BAT1-CW | UNIVERSAL | LED | 120/347 | WHITE | COLD WEATHER |

DIMENSIONS

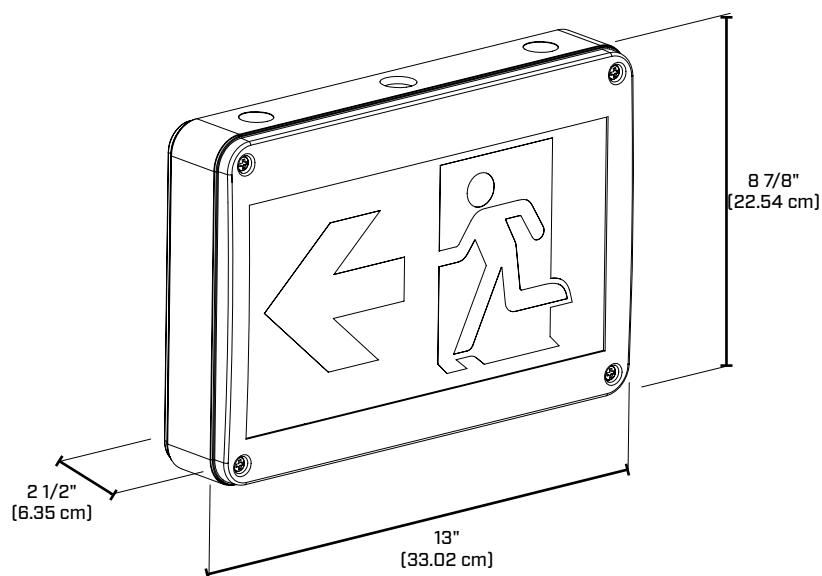

CONFIGURATIONS



Comes standard with three pictogram legends for direction selection.