

Project _____
Catalogue n° _____

Type _____
Date _____

AimLite

EB2

STEEL BATTERY UNIT



FEATURES & SPECIFICATIONS

CIRCUITRY

- 120-347 VAC input
- 6 VDC 27 W emergency power output versions
- Momentary push button test switch
- Pilot LED for AC ON and CHARGE
- Fully automatic, current limiter charger
- Solid state design and construction
- Complete battery recharge in 24 hours
- Maintenance free, sealed lead acid battery
- Wire connections provided for remote load

MECHANICAL

- 20 gauge steel construction
- 120 VAC line cord supplied loose in the box
- Universal spider knockout pattern and keyhole mounting slots stamped into back of cabinet
- Multiple conduit entry knockouts

COMPLIANCES

- CSA Certified to C22.2 #141
- Meets requirements of ICES-005

OVERVIEW




Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions.
All products are subject to change or may be discontinued any time without notice.

TECHNICAL SPECIFICATIONS TABLE

PART NUMBER	SERIES	DC VOLTS [VDC]	WATTS [W]	NUMBER OF HEADS	LAMP [W]	LIGHT SOURCE	INPUT VOLTS [V AC]	COLOUR
5000000	EB2	6	27	2	2	LED	120-347	WHITE

DIMENSIONS

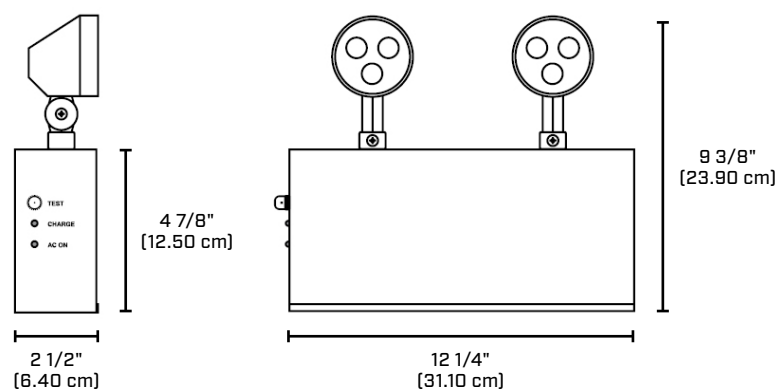

SPACING GUIDE

MOUNTING HEIGHT	SPACING CENTER TO CENTER (FT)
8FT	41.5
10FT	37.5
15FT	30
20FT	25.5

WIREGUARD

PART NUMBER	DIMENSIONS
WGD590-V2	17.75" X 16.75" X 6.5"