

RPSA STEEL SIGN RUNNING MAN



FEATURES & SPECIFICATIONS

CIRCUITRY - AC

- 120-347 VAC input
- Emergency DC wattages as follows: 6 VDC = 1 W, 12 VDC = 1 W, 24 VDC = 1 W

CIRCUITRY - SELF-POWERED

- 120-347 VAC input
- Ni-Cad battery
- 120 minutes emergency duration
- Solid state transfer and battery charger

MECHANICAL

- 20 gauge steel housing
- Universal faces
- Universal mounting : ceiling mount, wall mount, end mount

COMPLIANCES

- CSA Certified to C22.2 #141
- Meets requirements of ICES-005

OVERVIEW




Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.

TECHNICAL SPECIFICATIONS TABLE

PART NUMBER	SERIES	DC VOLTS [VDC]	NUMBER OF FACE	LIGHT SOURCE	INPUT VOLTS [V AC]	COLOUR
5000002	RPSA-UNVDC	UNVDC	UNIVERSAL	LED	120-347	WHITE
5000003	RPSA-BAT1	BAT1	UNIVERSAL	LED	120-347	WHITE

DIMENSIONS

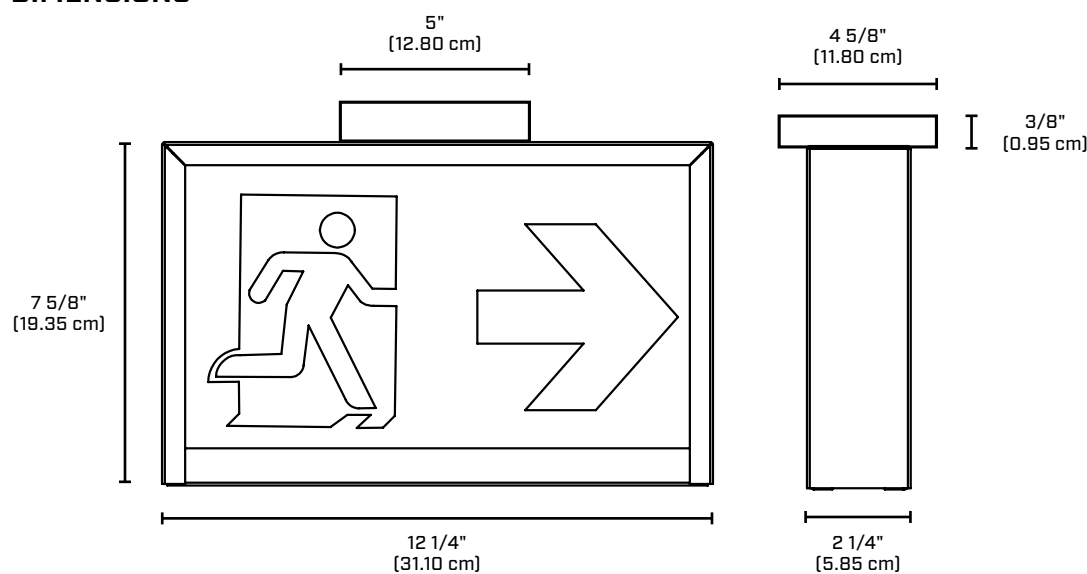

INCLUDED IN THE BOX



Comes standard with three pictogram legends for direction selection.