

VWP4

VAPOUR TIGHT LINEAR FLUORESCENT

2 OR 3 LAMPS



The VWP series of sealed 4 foot linear luminaires are for use in for both indoor and outdoor applications. Ideal for food processing and beverage plants, refrigerated storage, schools, parking garages, etc.

FEATURES & SPECIFICATIONS

CONSTRUCTION

Housing

- The housing is constructed from a one piece glass reinforced white fiberglass
- A closed cell, high temperature poured in place gasket and polycarbonate latches seal the enclosures from most hostile environments
- Very tough diffusers resist breakage and reduce replacement and maintenance costs
- Stainless steel latches are optional

Lens

Clear acrylic (impact resistant) ribbed lens standard. Choice of lenses include a shallow linear polycarbonate ribbed lens or a deeper optically clear lens which can accommodate a wide distribution specular reflector or a variation of smooth lenses.

MOUNTING

Ceiling mounting brackets included for ceiling or horizontal wall mounting.
 Bail brackets included for suspended ceiling mount.

BALLAST

T5 & T5HO: Our fixtures come standard with electronic program start ballasts.
T8: Our fixtures come standard with electronic program start ballasts.
Dimming ballasts and other ballast types are optional.

COMPLIANCES

- Suitable for damp and wet locations
- IP66
- IP67
- 1 500 PSI: High pressure hose down test (1.3 gallon per minute for 3 minutes at 1.5-2.0' from the unit) to maintain the integrity of the fixture. No water ingress is allowed
- NSF
- Nema 4X
- UL1598
- CSA Certified to C22.2 #250.0
- cCSAus

OVERVIEW	
LIGHT SOURCE	FLUORESCENT
WATTS (W)	28, 32 54
LAMP TYPE	T5, T5HO, T8
      	

Not all products are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/search.

ORDERING GUIDE

VWP4

SERIES	NBR OF LAMPS	LAMP TYPE	WATTS [W]	OPERATION	REFLECTOR TYPE	VOLTS [V]	OPTIONS
VWP4	F2 - 2 LAMPS F3 - 3 LAMPS	T8	32 - 32	AC - AC ONLY DL ¹ - DUAL AC & EMERGENCY	BLANK - WHITE SBR - SPEC. BASIC REFLECTOR SWD ² - SPEC. WIDE DISTRIBUTION	120 - 120	FRZ ³ - LOW AMBIENT STARTING TEMPERATURE [-29°C] RPD - RAPID/PROGRAM START BALLAST (STANDARD FOR T5 OPERATION) DIM - DIMMABLE BALLAST FUS - IN LINE FUSE PROTECTION HT - HIGH AMBIENT TEMP. (40°C) L6-10 - POWER CORD 6 -10 FT AC - AVIATION CABLE KIT SS - STAINLESS STEEL LATCHES OS ⁴ - OCCUPANCY SENSOR DCA - DEEP CLEAR ACRYLIC LENS SCAL - SMOOTH CLEAR ACRYLIC LENS SCPL - SMOOTH CLEAR POLYCAR- BONATE LENS SFPL - SMOOTH FROSTED POLYCARBONATE LENS TP - VANDAL RESISTANT SCREWS
	T5	28 - 28	120-277 - 120-277				
	T5HO	54 - 54	347 - 347				

¹ Available for 120/277V only.

² SWD reflector available only with DCA lens 2 lamps.

³ Not available with Program Start T8 ballasts.

⁴ To see available options, please consult the occupancy sensors section.

LENS TABLE

	MATERIAL		TEXTURE		TRANSLUCENCY	
	POLYCARBONATE	IMPACT RESISTANT ACRYLIC	RIBBED	SMOOTH	CLEAR	FROSTED
STANDARD LENS		X	X		X	
DCA		X		X (DEEP)	X	
SCAL		X		X	X	
SCPL	X			X	X	
SFPL	X			X		X

OCCUPANCY SENSORS

ON-OFF SENSORS

Detection - On at [Detection Area] % during [Hold Time] min. Off

PART NO	POSITION	VOLTS [VAC]	TECHNOLOGY	HEIGHT [FT]	DETECTION AREA (%)	HOLD TIME [MIN.]	DAYLIGHT MIN LEVEL [LUX]	REMOTE*	LOCATION**
OSE-PO-0301	EXTERNAL	120-347	PIR	20-40	100	20	N/A		DRY, -10°C TO 70°C
OSE-PO-0501	EXTERNAL	120-347	PIR	15-40	100	15	3000	OSI-FSIR-100	DRY, 0°C TO 70°C
OSE-PO-0502	EXTERNAL	120-347	PIR	15-40	100	15	3000		DRY, 0°C TO 70°C
OSE-PO-0701	EXTERNAL	120-277	PIR	20	100	15	N/A		WET, -40°C TO 70°C
OSE-PO-0801	EXTERNAL	347	PIR	20	100	15	N/A		WET, -40°C TO 70°C


* To be ordered separately.

** Verify fixture temperature for compatibility with sensor.


For more settings visit
www.aimlite.com/documentation/technical-information/

VWP4


DIMENSIONS

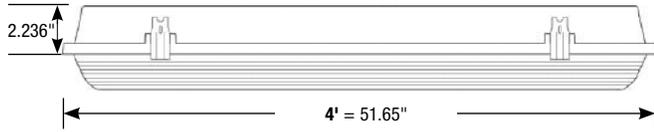


CEILING MOUNTING BRACKETS




BAIL BRACKETS



4.38"



SBR Reflector



SWD Reflector