



AimLite

MLF-L LED Mini Flood Light

3 CCT AND 2 POWER SELECTABLE & INTEGRATED PHOTOCELL¹



FEATURES

- Power Selection (15/25 W, 35/60 W)
- 3 CCT Selectable (3 000/4 000/5 000 K) default setting at 4 000 K
- Integrated On/Off Photocell
- Knuckle or Yoke mount



CCT
SELECTABLE



WET
LOCATION



POWER
SELECTABLE



65
IP
RATING



QUICKSHIP



ICES
005



LED



CERTIFIED



DIMMABLE



DLC
LISTED
PREMIUM

¹INTEGRATED PHOTOCELL ON CERTAIN CONFIGURATIONS. CONSULT THE SPECIFICATION TABLE FOR MORE DETAILS.

AimLite

MLF-L

T 514 227-1288

TF 1866 348-2374


aimlite.com

Ordering Guide

PART NO.	DLC UNIQUE ID	WATTS	VOLTS	COLOR TEMP.	LUMEN OUTPUT	EFFICIENCY	CRI	LIFE L70 [HRS]	TESTED HOURS LM-80 [HRS]	CALC. TM21 [HRS]	NEMA type	B.U.G.	EPA [ft2]	LED Current	PHOTOCELL [YES/NO]	PF	THD [%]	TRADITIONAL EQUIVALENT [W]	MASTER CASE QTY	
		[W]	[VAC]	[K]	[LM]	[LM/W]														
CCT AND POWER SELECTABLE WITH INTEGRATED PHOTOCELL [®]																				
MLF-PS25A-2-3CBRYK	S-YFG00N	15/25	120-277	3 000/4 000/5 000	2 100/3 500	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.18	0.23	NO	≥0.90	≤20	70-100	100-150	10
MLF-PS25A-2-3CBKRN	S-YFG00N	15/25	120-277	3 000/4 000/5 000	2 100/3 500	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.18	0.23	NO	≥0.90	≤20	70-100	100-150	10
MLF-PS60A-23CBRYKP	S-MLRPAB	35/60	120-277	3 000/4 000/5 000	4 900/8 400	125-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.42	0.6	YES	≥0.90	≤20	175-400	150-250	10
MLF-PS60A-23CBKRNK	S-MLRPAB	35/60	120-277	3 000/4 000/5 000	4 900/8 400	120-140	80+	50 000	9000	140 000	7HX6V	B3 U0 G1	0.42	0.6	YES	≥0.90	≤20	175-400	150-250	10



Physical Characteristics

- Clear tempered glass Lens

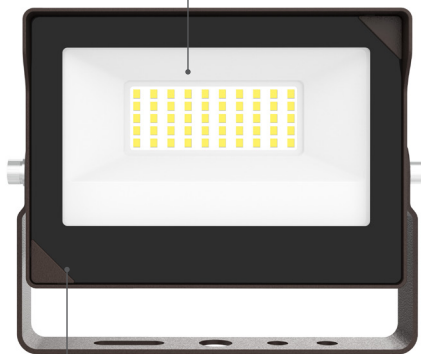

- Bronze finish

- Aluminum heat sink

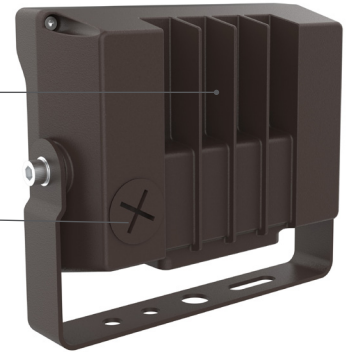

- CCT select
3 000/4 000/ 5 000K

- Power select
15/25W
35/60W

Standard Mounting Offering

Knuckle Mount



Yoke Mount

