

AimLite


CYL LED CYLINDER WALL MOUNT

3 CCT SELECTABLE AND INTEGRATED PHOTOCELL



FEATURES

- 20W and 36W
- 3 CCT Selectable (3 000/4 000/5 000 K)
- Integrated On-Off photocell
- Standard 20 degree beam angle and additional 40 degrees and/or 80 degrees optics included
- Selectable light direction (Uplight, Downlight, Uplight/Downlight)

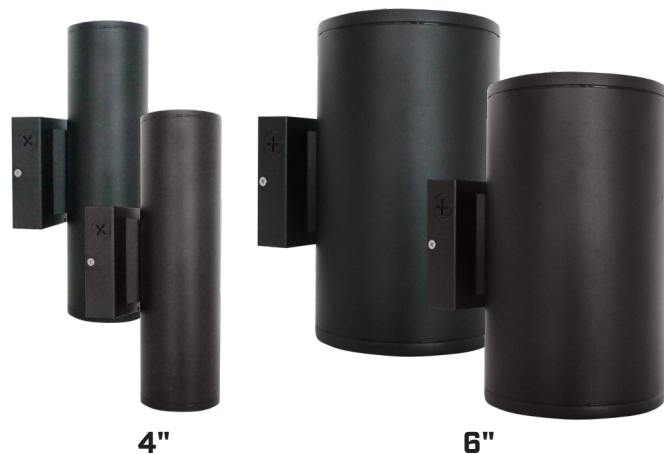

QUICKSHIP



LED



WET
LOCATION



65
IP
RATING



ICES
005



AimLite

CYL

T 514 227-1288

TF 1866 348-2374

aimlite.com

QUICK SHIP ORDERING GUIDE



PART NO	WATTS	VOLTS	COLOR TEMP.	LUMEN OUT- PUT	EFFI- CIENCY	CRI	LIFE L70	BEAM ANGLE	FINISH	PHOTO- CELL (YES/ NO)	DIM- MING (YES/ NO)	PF	THD	TRADITIONAL EQUIVALENT (W)		MAS- TER CASE QTY
	[W]	[VAC]	[K] ¹	[LM] ^{2,3}	[LM/W]		[HRS] ⁴	[°]					[%]	MH	HPS	
CCT SELECTABLE WITH INTEGRATED PHOTOCELL⁵																
4"																
CYL-4LA1-32-3C-BKP	20	120-347	3 000/4 000/5 000	2 445	122	80+	50 000	20	BLACK	YES	YES	≥0.90	≤20	70	70	5
CYL-4LA1-32-3C-BRP	20	120-347	3 000/4 000/5 000	2 445	122	80+	50 000	20	BRONZE	YES	YES	≥0.90	≤20	70	70	5
6"																
CYL-6LA2-32-3C-BKP	36	120-347	3 000/4 000/5 000	4 254	118	80+	50 000	20	BLACK	YES	YES	≥0.90	≤20	150	100-150	4
CYL-6LA2-32-3C-BRP	36	120-347	3 000/4 000/5 000	4 254	118	80+	50 000	20	BRONZE	YES	YES	≥0.90	≤20	150	100-150	4

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80-08 testing report and projected per IESNA TM-21-11 extrapolations

⁵ Integrated ON/OFF photocell that can be easily disabled.

INCLUDED IN THE BOX



OPTICS (TWO PER BOX)



FRONT SIDE OF OPTIC




BACK SIDE OF OPTIC

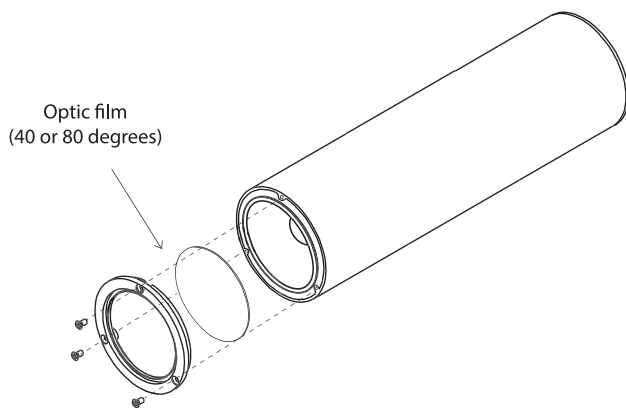


SELECTABLE LIGHT DIRECTION


EASY ACCESS TO A LIGHT DIRECTION SWITCH.

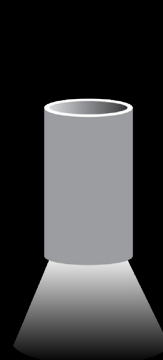

DOWNLIGHT

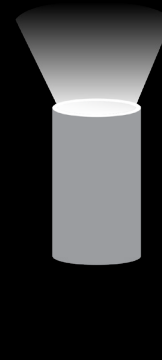

UPLIGHT

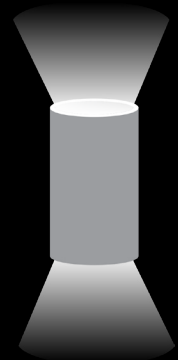

UPLIGHT/
DOWNLIGHT