# AimLite

# W13GM LED WRAPAROUND

## 5 CCT AND 3 POWER SELECTABLE

## FEATURES

- Available in 2 ft and 4 ft lengths

- Sleek and low-profile design with a frosted lens for smooth and uniform illumination

- Linkable and hardwire end cap options

- Offered as dedicated color temperature (4 000 K) and power, or 5 colour temperature (3 000/3 500/4 000/4 500/5 000 K) and 3 power selectable

- 0-10 V dimming (row dimming only when hardwired)

- Perfect for surface and row-mounted installations

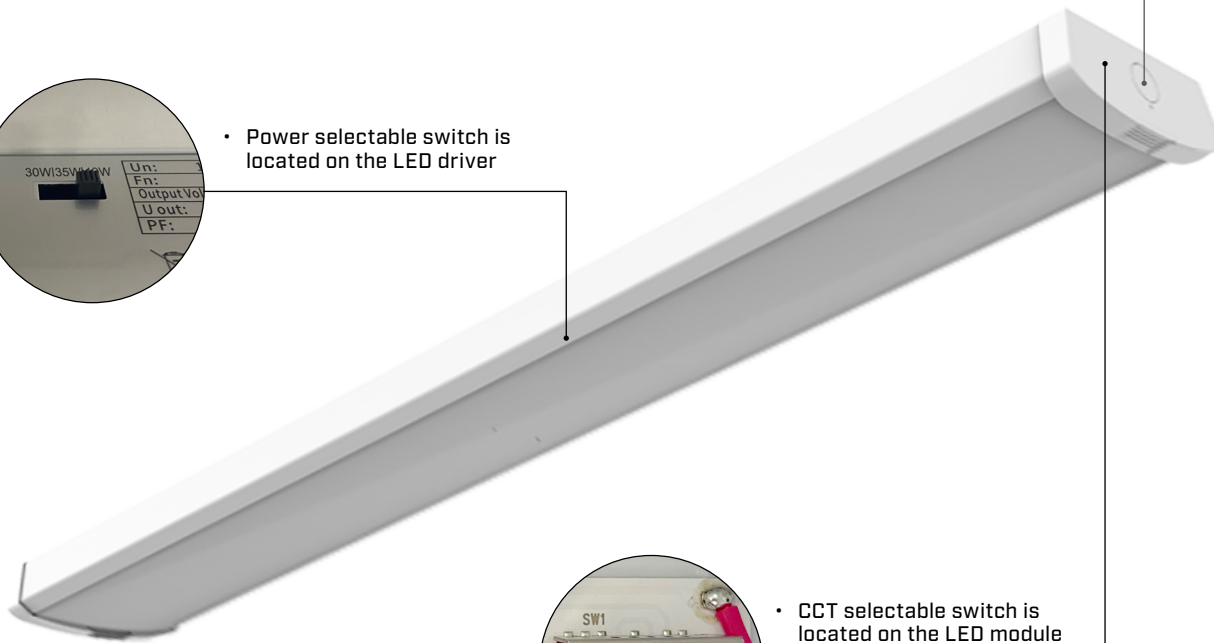- Ideal solution for commercial and residential applications

WARRANTY 5 YEAR WARRANTY | CCT 5CCT SELECTABLE | W POWER SELECTABLE | QUICKSHIP | LED | DIMMABLE | DAMP LOCATION

ICES 005 | cETLus Intertek | FC | DLC LISTED PREMIUM | DLC LISTED

# W13GM

## 5 CCT and 3 Power Selectable

- Hardwire and Linkable end cap options for different installation needs

- Power selectable switch is located on the LED driver

30W|35W|40W

Un:
Fn:
Output Vol
U out:
PF:

- CCT selectable switch is located on the LED module

SW1

50/45/40/35/30K

* Above picture shows the hardwire luminaire version. Please refer to the spec sheet for details on all available versions.

---

## End Cap Views

M

Linkable Luminaires

Hardwire Luminaires

## Included in Box
### (Linkable Models Only)

Linkable Connector

12" Linkable Cable Connector

---