



AimLite

BLRD Dome Top Bollards

CCT & POWER SELECTABLE
WITH ON/OFF PHOTOCELL



FEATURES

- Aluminum die cast housing available in black finishes
- Selectable Color Temperature (3 000/4 000/5 000 K)
- Power Selectable (14/19/24 W)
- Optics selection: cone or louver
- Integrated On/Off photocell that can be easily enabled
- Clear Polycarbonate lens



MODEL NUMBER	DLC UNIQUE ID	OPTIC	WATTS [W]	VOLTS [VAC]	COLOR TEMP. [K] ¹	LUMEN OUTPUT [LM] ^{2,3}	EFFICACY [LM/W]	CRI	LIFE L70 [HRS] ⁴	TESTED HOURS LM-80 [HRS] ⁴	DISTRIBUTION TYPE	FINISH	PHOTOCELL [YES/NO] ⁵	DIMMING [YES/NO]	PF	THD [%]	MASTER CASE QTY
CCT AND POWER SELECTABLE WITH INTEGRATED PHOTOCELL⁵																	
DOME HEAD																	
BLRD-PS24L323CBK	-	LOUVER	14/19/24	120-347	3 000/4 000/5 000	1 116/1 520/1 930	82-85	70+	151 000	>54 000	V	BLACK	YES	YES	≥0.9	≤25	1
BLRD-PS24C323CBK	TBD	CONE	14/19/24	120-347	3 000/4 000/5 000	2 010/2 814/3 593	152-154	70+	151 000	>54 000	V	BLACK	YES	YES	≥0.9	≤25	1

¹ Typical color temperature range: +/- 5 %.


² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

⁵ Integrated ON/OFF photocell that can be easily disabled.


Physical Characteristics

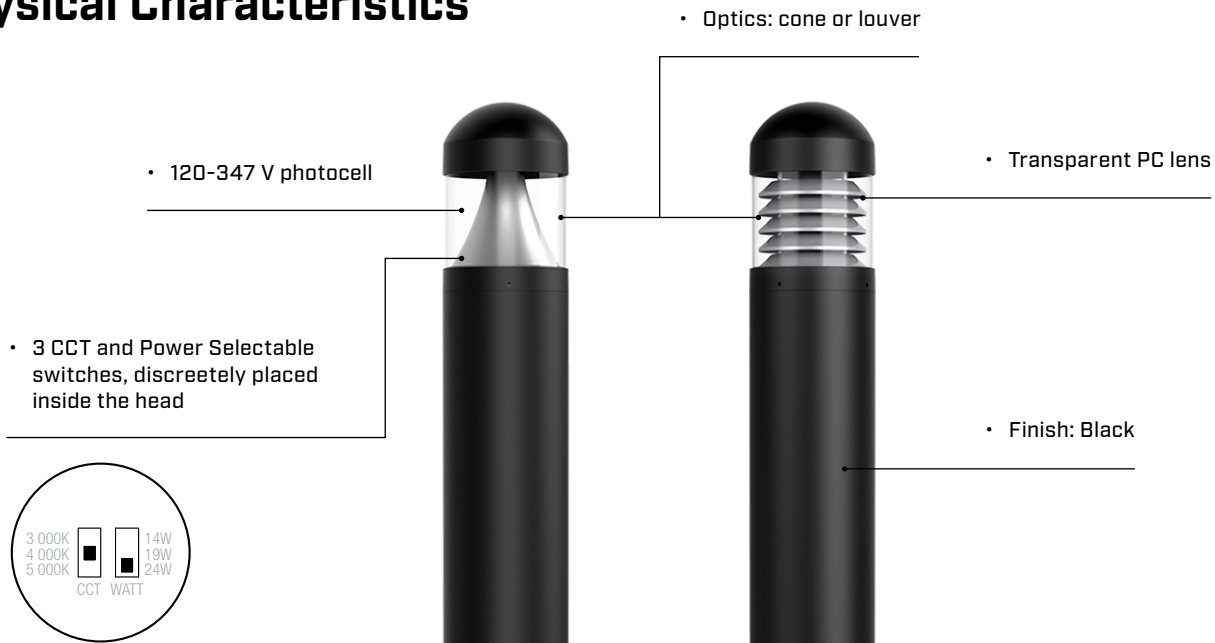

Accessories [order separately]



GS016-BK:
180 deg. Glareshield

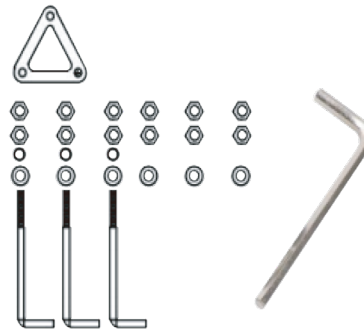

KIT-ANC-BOL6:
Bin Anchor bolt kit