

AimLite

A12K-L AREA LIGHT



LED



IP
RATING



DIMMABLE



IMPACT
RESISTANCE




WET
LOCATION

OVERVIEW

- 75 W - 230 W
- 11 607 lm - 37 720 lm
- 165 lm/W - 170 lm/W
- Type III, IV and V distributions
- 3 000 K - 4 000 K - 5 000 K
- All configurations come standard with a 3 pin receptacle and shorting cap.

EASY LIGHT DISTRIBUTION

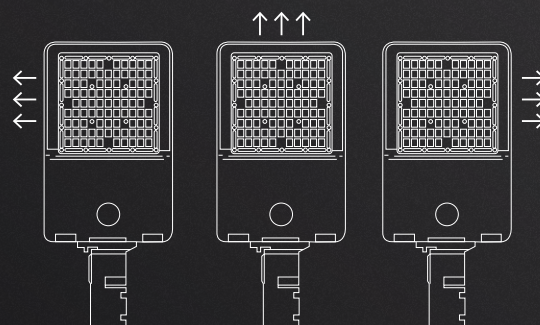

Simply rotate the lens and get different light distribution in different directions.

MOUNTING OPTIONS

PA6 -	6" square pole arm
PA6R -	6" round pole arm
A -	Slipfitter
TR -	Yoke mount
AR -	Adjustable arm for square pole

OPTIONS

PR7 -	7 pin photocell receptacle only
KV ¹ -	10 kV surge protection
OSI-PB-1001 ² -	Occupancy sensor

¹ Apply only for 347 V as it's come standard in 120-277 V.

² Please consult the occupancy sensor section for the specifications.