The background of the image shows an industrial facility at night, with large, insulated pipes and metal structures illuminated by artificial lights. A prominent red diagonal graphic cuts across the lower half of the image, serving as a background for the main text.

HAZARDOUS LOCATION LIGHTING

AimLite

CONTENT





4 YOUR TRUSTED PARTNER

6 WHAT ARE HAZARDOUS LOCATIONS?

Hazardous Classes & Divisions, Gas & Dust Groups,
Temperature Classifications

10 LUMINAIRES

High Bays, Flood Lights, Linears, Vapor Tight

20 HAZARDOUS EMERGENCY LIGHTING

Running Man, Exit Signs, Battery Units, Remote Fixtures

YOUR TRUSTED PARTNER



ABOUT US

AimLite has always been a pioneer in emergency lighting and have been carrying a wide emergency lighting product offering especially designed to work in hazardous environments. Today, AimLite is capitalizing on its expertise and expanding its indoor and outdoor general lighting offering by introducing new hazardous fixtures, High Bays, Vapour Tights and Flood lights which are also designed and tested to operate in hazardous applications

Our ISO/IEC 17025 certified laboratory is qualified by CSA International under the CPC (Certification by Category) program which allows us to conduct safety and performance evaluations and to perform over 100 different tests on our products. This allows AimLite to certify new custom products quickly and launch to the market.

AimLite's target is to maintain and improve its quality through programs that enable employees to do their job right the first time and use the best suppliers that share these same values.

Our team consists of some of the most knowledgeable and recognizable people in the Canadian emergency and lighting industry.

NEW PRODUCT DEVELOPMENT

Our engineering and marketing team is composed of specialists ranging from a variety of technical backgrounds which allows us to develop a multitude of new products to meet today's market needs and requirements. Our focus is to design innovative products at a competitive price to set ourselves ahead of our competition while maintaining industry standards such as long life and energy efficiency.


CUSTOMER SATISFACTION

Customer satisfaction is the company's main priority: we want to be our customers' preferred supplier.

Our customer service department is comprised of highly trained, knowledgeable and bilingual sales representatives whose only goal is to meet the needs of the customers. Sales staffs are continuously trained to keep them abreast of the latest lighting trends, technologies and developments so they may actively serve customers, resolve issues, initiate changes, and teach co-workers.

Our technicians have extensive academic and practical experience with degrees in engineering and administration, allowing us to offer technical support in the retail, distribution and manufacturing sectors.

AimLite's management is dedicated to its customers, employees and safety.

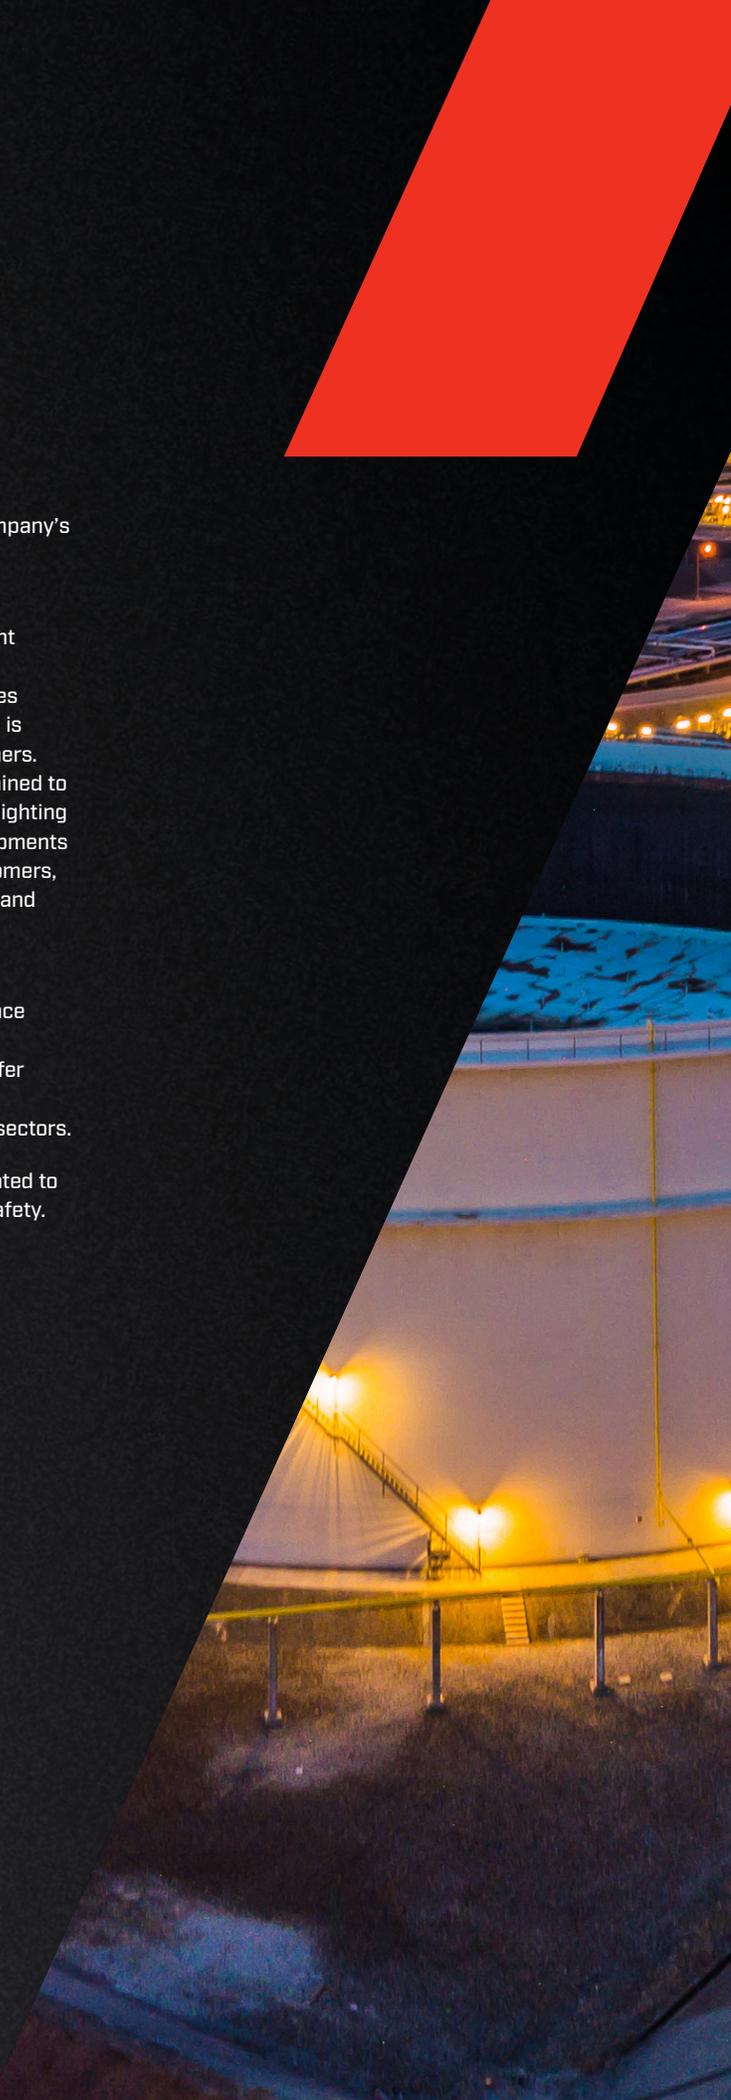





WHAT ARE HAZARDOUS LOCATIONS?

A hazardous area (also known as a potentially explosive atmosphere) is an environment that consists of air containing any concentrations of flammable gases, vapors, mists, liquids, combustible dusts or even small fibers that are potentially explosive in nature. Situations which involve the processes of production, transformation, delivery and stocking of flammable substances commonly produce potentially explosive environments.

Typical industries include: Oil & Gas, Petrochemical Refining & Processing, Fuel Storage, Chemical Manufacturing, and Power Generation. Other industries include: Car Manufacturing, Water Treatment, Pharmaceutical, Distilleries, Food Manufacturers, Aviation, Military, and Blast & Paint.

However, many companies don't realize dust can also create hazardous areas, and places such as food and beverage manufacturers, plastics factories, flour mills, recycling operations and grain handling & storage also need to ensure any potential hazardous areas are classified correctly.



WHY USE HAZARDOUS LOCATION LIGHTING?

Electrical equipment intended to be installed in such environments must be specially designed and tested to meet a range of requirements that together ensure the safety of personnel and avoid potentially dangerous situations resulting from the equipment's reaction to its surroundings.

Special enclosures, wiring, electrical components, and structural integrity must be used for safety purposes.





HAZARDOUS CLASSES & DIVISIONS

CLASSES

Class defines the general nature (or properties) of the hazardous material in the surrounding

CLASS I

Hazardous because flammable gases or vapors are present in the air in quantities sufficient to produce explosive or ignitable mixtures

CLASS II

Hazardous because combustible or conductive dusts are present

CLASS III

Hazardous because ignitable fibers or flying's are present, but not likely to be in suspension in sufficient quantities to produce ignitable mixtures.

DIVISIONS

Division defines the probability of the hazardous material being present in an ignitable concentration in the surrounding atmosphere

DIVISION 1

The substance referred to by class is present during normal conditions

DIVISION 2

The substance referred to by class is present only in abnormal conditions, such as container failure or system breakdown



GAS & DUST GROUPS

Explosive atmospheres have different chemical properties that affect the likelihood and severity of an explosion. Such properties include flame temperature, minimum ignition energy, upper and lower explosive limits, and molecular weight.

Every substance has a differing combination of properties but it is found that they can be ranked into similar ranges, simplifying the selection of equipment for hazardous areas.

Each chemical gas or vapour used in industry is classified into a gas group.

AREA	GROUP	REPRESENTATIVE MATERIALS
CLASS I, DIVISION 1 & 2	A	ACETYLENE
	B	HYDROGEN
	C	ETHYLENE
	D	PROPANE
CLASS II, DIVISION 1 & 2	E	METAL DUSTS, SUCH AS MAGNESIUM
	F	CARBONACEOUS DUSTS, SUCH AS CARBON & CHARCOAL
	G	NON-CONDUCTIVE DUSTS, SUCH AS FLOUR, GRAIN, WOOD & PLASTIC
CLASS III, DIVISION 1 & 2	NONE	IGNITABLE FIBERS/FLYING'S, SUCH AS COTTON LINT, FLAX & RAYON



TEMPERATURE CLASSIFICATIONS

Another important consideration is the temperature classification of the electrical equipment. The following table tells us, for example, that the surface temperature of a piece of electrical equipment with a temperature classification of T3 will not rise above 200 °C.

NORTH AMERICA (NEC) °C	
T1 - 450	T3A - 180
T2 - 300	T3B - 165
T2A - 280	T3C - 160
T2B - 260	T4 - 135
T2C - 230	T4A - 120
T2D - 215	T5 - 100
T3 - 200	T6 - 85



HIGH BAYS

HZB1 HAZARDOUS LOCATION HIGH BAYS

CLASS I, DIVISION 1, GROUPS B, C, D
NON RECESSED MARINE LUMINAIRES,
OUTSIDE TYPE (SALT WATER)



ZONE RATINGS EQUIVALENTS

- Class I, Zone 1, Group IIB

OVERVIEW			
WATTS [W]	30, 60, 100, 150	EFFICIENCY [LM/W]	128-155
LUMEN OUTPUT [LM]	3 992-23 486	COLOR TEMPERATURE [K]	3 000, 4 000, 5 000, 5 700, 6 500

ORDERING GUIDE

SERIES	LUMEN PACKAGE [W]	VOLTS [V]	COLOR TEMP. [K]	LENS TYPE	BEAM ANGLE [°]	CASTING COLOR
HZB1	A1 - 30 A2 - 60 A3 - 100	2 - 120-277	30 - 3 000 40 - 4 000 50 - 5 000	G - CLEAR FLAT GLASS	MW2 - 80 W3 - 110	GY - GREY
	A4 - 150	2 - 120-277 7 - 277-480	57 - 5 700 65 - 6 500	D ¹ - DROP GLASS S ¹ - CLEAR STRIPPED SPHERICAL GLASS	W4 - 120	

¹ Drop glass lens and stripped spherical lens are only available for 30 W and 60 W models.

ACCESSORIES (ORDER SEPARATELY)



YOKE



WIREGUARD FOR FLAT LENS



WIREGUARD FOR SPHERICAL LENS



WIREGUARD FOR DROP LENS



JUNCTION BOX



LED



DIMMABLE



WET LOCATION



HAZARDOUS LOCATION



IP RATING



IMPACT RESISTANCE



ICES 005



NEMA 4X



CERTIFIED



MARINE LISTED



Scan for more details

HZB2 HAZARDOUS LOCATION HIGH BAY

CLASS I, DIVISION 2, GROUPS A, B, C, D
NON RECESSED MARINE LUMINAIRES, OUTSIDE
TYPE (SALT WATER)



ZONE RATINGS EQUIVALENTS

- Class I, Zone 2, Group IIC

OVERVIEW			
WATTS [W]	30, 60, 100, 150	EFFICIENCY [LM/W]	114 - 152
LUMEN OUTPUT [LM]	3 420 - 22 650	COLOR TEMPERATURE [K]	2 700, 3 000, 4 000, 5 000, 5 700, 6 500

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE



PART NUMBER	LENS TYPE	WATTS [W]	COLOR TEMPS. [K] ¹	LUMEN OUTPUT [LM] ^{2,3}	EFFICACY [LM/W]	CRI	LIFE L70 [HRS] ⁴	TESTED HOURS LM-80 [HRS] ⁴	BEAM ANGLE [°]	B.U.G	LED CURRENT [MA]	FINISH	POWER FACTOR	THD [%]
HZB2-A3-2-40-GW3GY	FLAT	100	4 000	15 651	150	80+	60 000	17 000	110	B3-U2-G1	1667	GREY	≥0.9	≤20

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.


⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

ORDERING GUIDE

ACCESSORIES (ORDER SEPARATELY)



YOKE



WIREGUARD FOR FLAT LENS



WIREGUARD FOR SPHERICAL LENS



WIREGUARD FOR DROP LENS



JUNCTION BOX



LED



DIMMABLE



WET LOCATION



HAZARDOUS LOCATION



IP RATING



IK07 IMPACT RESISTANCE



IK09 IMPACT RESISTANCE



ICES 005



NEMA 4X



CERTIFIED



MARINE LISTED



Scan for more details



FLOOD LIGHTS

HZF1

HAZARDOUS LOCATION FLOOD LIGHTS

CLASS I, DIVISION 1, GROUPS C, D
 CLASS I, DIVISION 2, GROUPS A, B, C, D
 NON RECESSED MARINE LUMINAIRES,



ZONE RATINGS EQUIVALENTS


- Class I, Zone 1, Group IIB

OVERVIEW			
WATTS [W]	30, 60, 100, 150, 200	EFFICIENCY [LM/W]	128 - 165
LUMEN OUTPUT [LM]	4 050-31 400	COLOR TEMPERATURE [K]	2 700, 3 000, 4 000, 5 000, 5 700, 6 500

ORDERING GUIDE

SERIES	LUMEN PACKAGE [W]	BEAM ANGLE	VOLTS [V]	COLOR TEMPERATURE [K]	CASTING COLOR
HZF1	A1 - 30 A2 - 60 A3 - 100 A5 - 200 A4 - 150	N2 - 23° W3 - 110° VW1 - 7Hx6V	2 - 120-277 2 - 120-277 7 - 277-480	27 - 2 700 30 - 3 000 40 - 4 000 50 - 5 000 57 - 5 700 65 - 6 500	GY - GREY

ACCESSORIES (ORDER SEPARATELY)

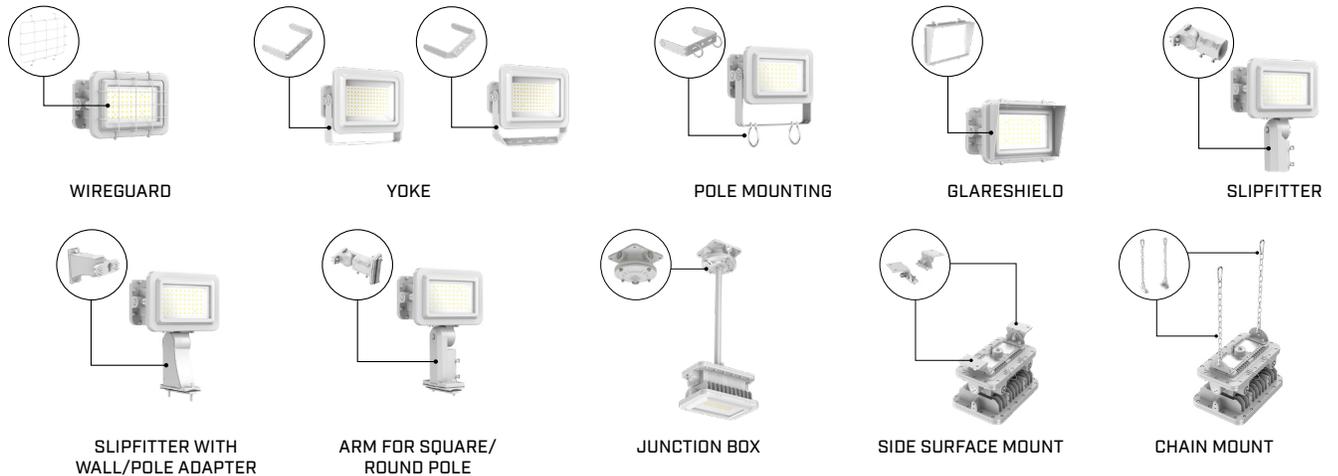

HZF2 HAZARDOUS LOCATION FLOOD LIGHTS

CLASS I, DIVISION 2, GROUPS A, B, C, D
NON RECESSED MARINE LUMINAIRES, OUTSIDE
TYPE (SALT WATER)



ZONE RATINGS EQUIVALENTS

- Class I, Zone 2, Group IIC

OVERVIEW			
WATTS [W]	30, 60, 100, 150, 200, 240, 300, 400	EFFICIENCY [LM/W]	135 - 166
LUMEN OUTPUT [LM]	4 275 - 64 800	COLOR TEMPERATURE [K]	2 700, 3 000, 4 000, 5 000, 5 700, 6 500

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE



PART NUMBER	WATTS	COLOR TEMPS.	LUMEN OUTPUT	EFFICACY	CRI	LIFE L70	TESTED HOURS LM-80	BEAM ANGLE	B.U.G RATING	LED CURRENT	FINISH	POWER FACTOR	THD
	[W]	[K]	[LM] ^{2,3}	[LM/W]		[HRS] ⁴	[HRS] ⁴	[°]		[MA]		≥0.9	≤20
HZF2-A2W3-2-40-GY	60	4 000	9 724	157	70+	60 000	10 000	110	B3-U2-G1	662	GREY	≥0.9	≤20
HZF2-A3W3-2-40-GY	100	4 000	16 879	164	70+	60 000	10 000	110	B3-U2-G1	810	GREY	≥0.9	≤20

¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.

³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.

ORDERING GUIDE

ACCESSORIES (ORDER SEPARATELY)



WIREGUARD



YOKE



POLE MOUNTING



GLARESHIELD



SLIPFITTER




SLIPFITTER WITH
WALL/POLE ADAPTER



ARM FOR SQUARE/
ROUND POLE



SIDE SURFACE MOUNT

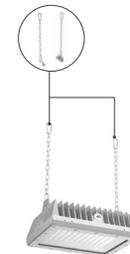

CHAIN MOUNT



JUNCTION BOX



LED



DIMMABLE



WET
LOCATION



HAZARDOUS
LOCATION



66
IP
RATING



IK08
IMPACT
RESISTANCE



ICES
005



NEMA
4X



UL
CERTIFIED



MARINE
LISTED



Scan for more details



LINEARS

HZL2 HAZARDOUS LOCATION LED LINEAR LUMINAIRE

CLASS I, DIVISION 2, GROUPS A, B, C, D
NON RECESSED MARINE LUMINAIRES, OUTSIDE
TYPE (SALT WATER)



2 ft. (40 W)



4 ft. (80 W, 120 W)

ZONE RATINGS EQUIVALENTS

- Class I, Zone 2, Group IIC

OVERVIEW			
WATTS [W]	40, 80, 120	EFFICIENCY [LM/W]	156 - 165
LUMEN OUTPUT [LM]	6 529 - 19 253	COLOR TEMPERATURE [K]	2 700, 3 000, 4 000, 5 000, 5 700, 6 500

QUICK SHIP AND TECHNICAL SPECIFICATION TABLE



PART NUMBER	WATTS	COLOR TEMPS.	LUMEN OUTPUT	EFFICACY	CRI	LIFE L70	TESTED HOURS LM-80	BEAM ANGLES	B.U.G RATING	LED CURRENT	FINISH	POWER FACTOR	THD
	[W]	[K] ¹	[LM] ^{2,3}	[LM/W]		[HRS] ⁴	[HRS] ⁴	[°]		[MA]			[%]
HZL2-A2W3-2-40-GY	80	4 000	12 871	159	80+	54 000	17 000	110	B3-U3-G1	1 590	GREY	≥0.9	≤20


¹ Typical color temperature range: +/- 5 %.

² Lumen values are derived from photometric testing. Initial lumens range: +/- 10 %.


³ Lumen values are based on 4 000 K default programming. Please refer to the LUMEN SPECIFICATION TABLE for more details on other color temperatures.

⁴ Life hours are derived from IESNA LM-80 testing report and projected per IESNA TM-21 extrapolations.


ACCESSORIES (ORDER SEPARATELY)




SIDE SURFACE MOUNT



WIREGUARD



YOKE



CHAIN MOUNT



JUNCTION BOX



LED



DIMMABLE



WET LOCATION



HAZARDOUS LOCATION



IP RATING



IMPACT RESISTANCE



ICES 005

NEMA 4X



CERTIFIED



MARINE LISTED



Scan for more details



VAPOR TIGHTS

VWX4-L HAZARDOUS LOCATION LED VAPOR TIGHT

The VWX4-L is a series of vapor and dust tight fixtures specially designed for use in hazardous environments where flammable vapors or gases are present.



COMPLIANCES

- Class I - Division 2, Groups A, B, C and D, T5 for ambient of 40°C
- Class III - Division 1 & 2, T5 for ambient 40°C

OVERVIEW			
LIGHT SOURCE	LED	CRI	80+
WATTS [W]	31 - 79	WEIGHT [LBS]	14.15
LUMEN OUTPUT [LM]	3 797 - 10 047	AMBIENT TEMPERATURE [°C]	-40°C TO +40°C
EFFICACY [LM/W]	117 - 143	CONSTRUCTION	FIBERGLASS HOUSING, IMPACT RESISTANT ACRYLIC LENS, POM LATCHES AND STAINLESS STEEL MOUNTING HARDWARE
COLOR TEMPERATURE [K]	3 000, 3 500, 4 000, 5 000	MOUNTING	SURFACE, SUSPENDED

ORDERING GUIDE

SERIES	LAMP TYPE	LUMEN PACKAGE [LM]	CRI	VOLTS [VAC]	COLOR TEMP. [K]	OPTIONS
VWX4	L - LED	A1A - REFER TO THE TECHNICAL SPECIFICATION A2A - A3A - A4A - TABLE FOR MORE DETAILS	80 - 80	2 - 120-277 8 - 347	30K - 3000 35K - 3500 40K - 4000 50K - 5000	SS - STAINLESS STEEL LATCHES KV - 10KV SURGE PROTECTOR DL ¹ - EMERGENCY BACK UP (0°C-25°C) PC - POLYCARBONATE RIBBED FROSTED LENS SFAL - SMOOTH FROSTED ACRYLIC LENS SFPL - SMOOTH FROSTED POLYCARBONATE LENS TP - VANDAL RESISTANT SCREWS L6 - 6' WHITE POWER CORD L10 - 10' WHITE POWER CORD AC ² - AVIATION CABLE KIT RGB-45 - WALL MOUNT BRACKET [45°] L6-BK - 6' BLACK POWER CORD L10-BK - 10' BLACK POWER CORD

¹ When selecting DL option, the fixture maintains wet location status, however, NEMA 4X and IP ratings are no longer applicable

WARRANTY
5 YEAR
WARRANTY

PREMIUM
QUALITY

LED

WET
LOCATION

HAZARDOUS
LOCATION

66
IP
RATING


67
IP
RATING

SP®

NSF



Scan for more details

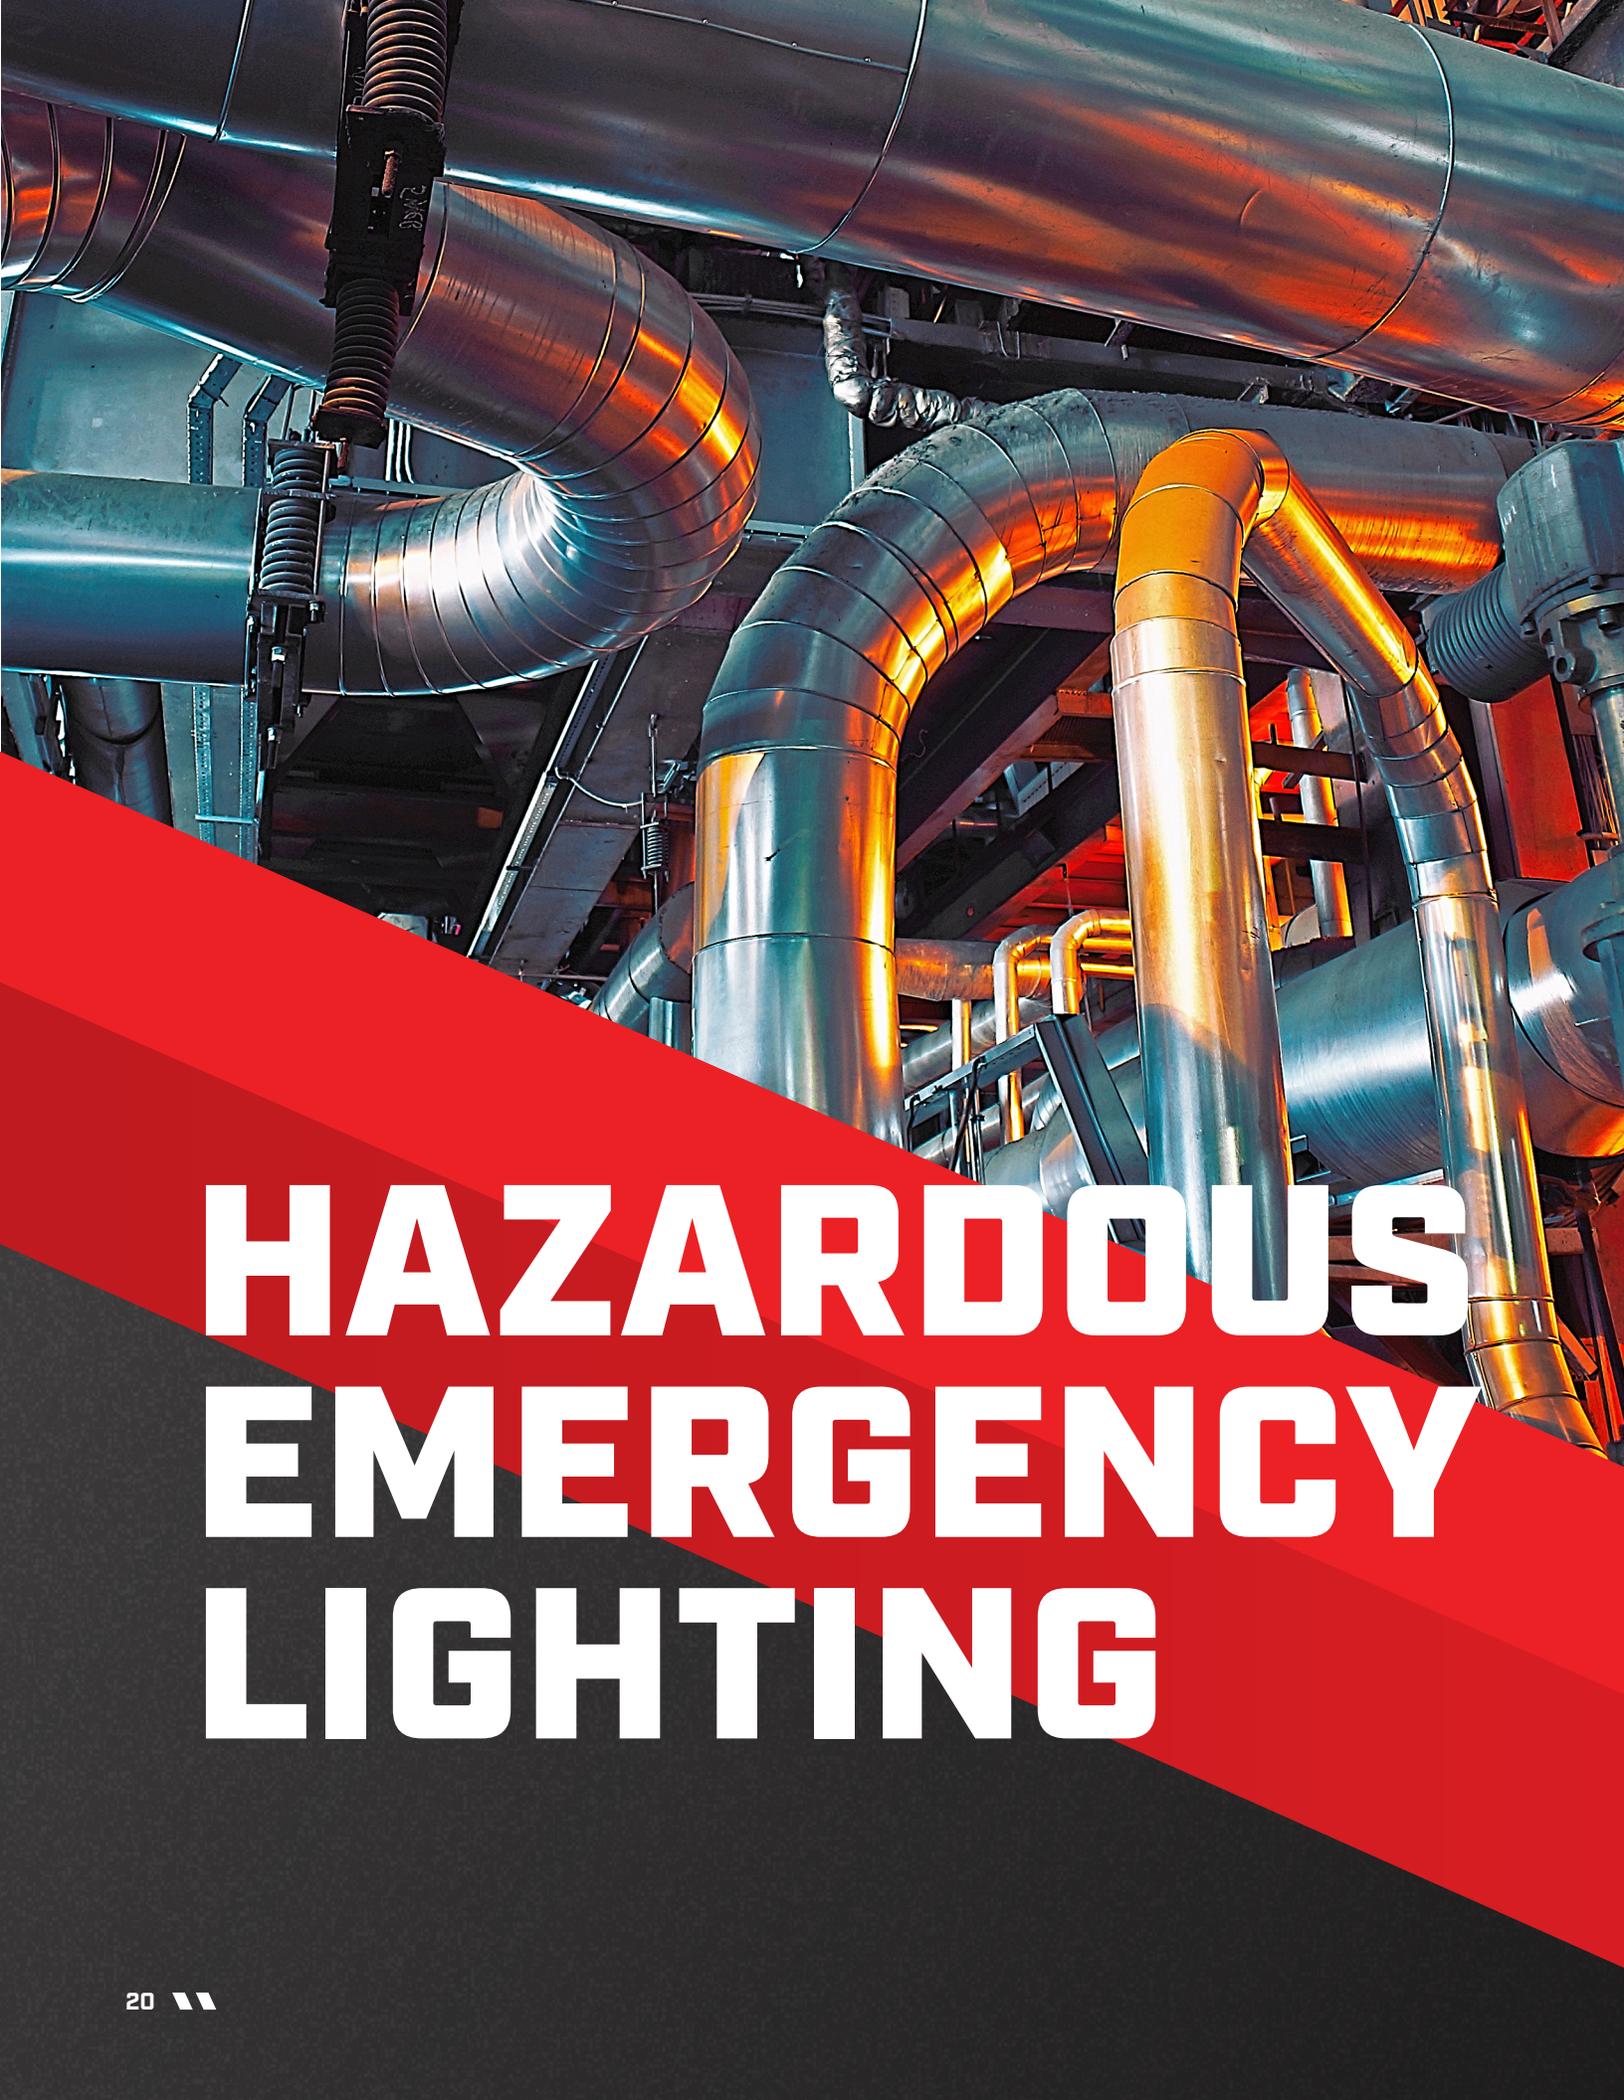

HAZARDOUS EMERGENCY LIGHTING

DELUGE - RPNX

HAZARDOUS LOCATION

RUNNING MAN

Class I, div 2, groups A, B, C, D

Class II, div 2, groups F, G

Class III, div 2



OVERVIEW	
LIGHT SOURCE	LED
INPUT VOLTAGE (VAC)	120/277/347
INPUT POWER	2 W AC & AC/DC SINGLE OR DOUBLE FACE 3.34 W SELF-POWERED SINGLE OR DOUBLE FACE
DC VOLTAGE / POWER	
6 VDC = 0.8 W 12 VDC = 0.9 W 24 VDC = 1.2 W	

ORDERING GUIDE

RPNX					
SERIES	NBR OF FACES	MOUNTING	FRAME COLOUR	DC VOLTAGE (VDC)	OPTIONS
RPNX	1 - SINGLE FACE 2 - DOUBLE FACE	BLANK - UNIVERSAL	BLK - BLACK WHT - WHITE	UNVDC - UNIVERSAL DC BACKUP VOLTAGE FROM 6 TO 24 BAT - SELF-POWERED FOR 90 MINUTES BAT1 - SELF-POWERED FOR 120 MINUTES	ATO ¹ - AUTOMATIC TEST STANDARD CW ² - COLD WEATHER AT -20°C TO +40°C O - NO INDICATORS (DOUBLE FACE ONLY) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL

¹Available only with BAT & BAT1. Mandatory with BAT & BAT1

²Available only with BAT



LED



WET
LOCATION



66
IP
RATING



ICES
005



HAZARDOUS
LOCATION



IK10
IMPACT
RESISTANCE



Energy Verified
Energie Verifiee



SANITATION
NSF/ANSI 2



Scan for more details

DELUGE - CRPNX

HAZARDOUS LOCATION COMBO

Class I, div 2, groups A, B, C, D

Class II, div 2, groups F, G

Class III, div 2



OVERVIEW			
LIGHT SOURCE	LED	CW1 INPUT POWER [W]	30
INPUT VOLTAGE [V AC]	120/277/347	OUTPUT VOLTAGE [V DC]	6, 12
CW1 INPUT VOLTAGE [V AC]	120/277/347		

ORDERING GUIDE

SÉRIE	VOLTAGE [V]	WATTAGE [W]	NBR OF FACES	HOUSING COLOR	HEADS	LAMP SELECTION	MANDATORY OPTIONS	OPTIONS
CRPNX	06 - 6	036 - 36 NI-CD	1 - SINGLE FACE 2 - DOUBLE FACE	BLK - BLACK WHT - WHITE	2 - 2 HEADS	SEE LAMP SELECTION CHART	ATD - AUTOTEST	BLANK - STANDARD +10°C TO +25°C CW1 ¹ - COLD WEATHER AT -40°C TO +40°C 0 - NO INDICATORS (DOUBLE FACE ONLY)
		050 - 50 LEAD ACID	1 - SINGLE FACE					
		072 - 72 LEAD ACID						
	12 - 12	036 - 36 NI-CD	1 - SINGLE FACE 2 - DOUBLE FACE					
		072 - 72 NI-CD	1 - SINGLE FACE					

¹ Available only with 6V 36W, 12V 36W and 12V 72W



LED



WET LOCATION



IP RATING



ICES 005



HAZARDOUS LOCATION



IMPACT RESISTANCE



Energy Verified
Energie Vérifiée



SANITATION
NSF/ANSI 2



Scan for more details

DELUGE - EBNX

HAZARDOUS LOCATION BATTERY UNIT

CLASS I, DIV 2, GROUPS A, B, C, D
 CLASS II, DIV 2, GROUPS F, G
 CLASS III, DIV 2



OVERVIEW			
INPUT VOLTAGE [V AC]	120/277/347	OUTPUT VOLTAGE [V DC]	6, 12
CW1 INPUT VOLTAGE [V AC]	120/277/347	OUTPUT POWER [W]	36 - 130
CW1 INPUT POWER [W]	30		

ORDERING GUIDE

EBNX					/ ATD	/
SERIES	VOLTS [V]	WATTS [W]	LAMP SELECTION	HOUSING COLOR	MANDATORY OPTIONS	OPTIONS
EBNX	06 - 6 12 - 12	036 - 36, NI-CD 050 - 50, LEAD ACID 072 - 72, LEAD ACID 100 - 100, LEAD ACID 130 - 130, LEAD ACID	SEE LAMP SELECTION CHART	BLK - BLACK WHT - WHITE	ATD - AUTO-TEST	BLANK - STANDARD +10°C TO +25°C CW1 ¹ - COLD WEATHER AT -40°C TO +40°C

¹ Only available with 6V 36W, 12V 36W and 12V 72W [Ni-Cd if ordered with CW1]



BRIDGE EMERGENCY LIGHTING LUMINAIRE REMOTE NORMALLY ON



LED



WET LOCATION



IP RATING



ICES 005



HAZARDOUS LOCATION



IK10 IMPACT RESISTANCE



Scan for more details

DELUGE - RMNX HAZARDOUS LOCATION REMOTE

CLASS I, DIV 2, GROUPS A, B, C, D
CLASS II, DIV 2, GROUPS F, G
CLASS III, DIV 2



OVERVIEW	
LIGHT SOURCE	LED
DC VOLTAGE (VDC)	6, 12 OR 24

RMNX					
SERIES	NBR OF HEADS	VOLTAGE (VDC)	WATTAGE (W)	LAMP TYPE	COLOR
RMNX	1 - SINGLE HEAD 2 - DOUBLE HEAD	6-24V - 6 TO 24 OPERATIONAL	4W - 4	LR - LED	BLK - BLACK WHT - WHITE
			5W - 5	LA - LED	
	12-24V - 12 TO 24 OPERATIONAL	6W - 6	LA - LED		
		7W - 7			



Scan for more details

RPHZ HAZARDOUS LOCATION

CLASS I, DIVISION 1 & 2, GROUPS C & D
AC, AC/DC
120/347 V AC INPUT



OVERVIEW

LIGHT SOURCE	LED	INPUT POWER [W]	3.4
INPUT VOLTAGE [V AC]	120/347	DC POWER [W]	1.8
INPUT VOLTAGE [V DC]	6, 12 OR 24		

ORDERING GUIDE

SERIES	NBR OF FACES	MOUNTING	VOLTS [V DC]	OPTIONS
RPHZ	1 - SINGLE FACE 2 - DOUBLE FACE	C - CEILING MOUNT P - PENDANT MOUNT W - WALL MOUNT	BLANK - AC ONLY 06 - 6 12 - 12 24 - 24	SPW - SPECIAL WORDING OR GRAPHIC 0 - NO INDICATORS (DOUBLE FACE ONLY) ↓ ↑ ↗ ↘ ↙ ↘ D U UR DR DL UL



LED



HAZARDOUS
LOCATION



ICES
005



Scan for more details

RPZN2

HAZARDOUS LOCATION

CLASS I, DIVISION 2, GROUPS C, D
AC, AC/DC & SELF-POWERED



[self powered version]

OVERVIEW			
LIGHT SOURCE	LED	OUTPUT VOLTAGE [V DC]	6, 12, OR 24
INPUT VOLTAGE [V AC]	120/347	DC POWER [W]	1.8
INPUT POWER [W]	3.6 AC/DC 4 SELF-POWERED		

ORDERING GUIDE

RPZN2 1 GRY — /

SERIES	NBR OF FACES	COLOR	OPERATION	OPTIONS
RPZN2	1 - SINGLE FACE	GRY - GREY	UNVDC - UNIVERSAL DC BACKUP VOLTAGE FROM 6 TO 24V DC BAT - SELF-POWERED FOR 90 MINUTES	      D U URDRDLUL



LED



HAZARDOUS
LOCATION




ICES
005



Scan for more details

CRPHZ HAZARDOUS LOCATION RUNNING MAN COMBO

CLASS I, DIVISION 1, GROUPS C & D
6 V DC, 12 V DC OR 24 V DC MODELS
120 OR 347 V AC INPUT

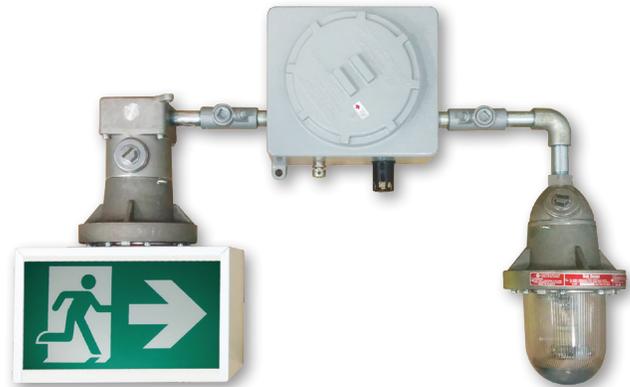

OVERVIEW			
LIGHT SOURCE	LED	OUTPUT POWER (W)	36 - 320
INPUT VOLTAGE (V AC)	120 OR 347	SIGN POWER CONSUMPTION (W)	4.8
OUTPUT VOLTAGE (V DC)	6, 12, OR 24	SIGN DC CONSUMPTION (W)	3.4

ORDERING GUIDE

CRPHZ							
SERIES	VOLTS (V DC)	WATTS (W)	NBR OF FACES	HEAD	LAMP/HEAD	LAMP	OPTIONS
CRPHZ	06 - 6 12 - 12 24 - 24	SEE MODEL RATING BELOW	1 - SINGLE FACE 2 - DOUBLE FACE	0 - NO HEAD 1Z - SINGLE HEAD	1 - SINGLE LAMP ASSEMBLY 2 - DOUBLE LAMP ASSEMBLY	SEE LAMP SELECTION BELOW	RDS - RADIO FREQUENCY SUPPRESSION (SPECIFY AC VOLTAGE) 0 - NO INDICATORS (DOUBLE FACE ONLY) ↓ ↑ ↗ ↘ ↙ ↘ 0 U UR DR DL UL



Scan for more details

EBHZ HAZARDOUS LOCATION BATTERY UNIT

CLASS I, DIVISION 1, GROUPS C & D
6, 12 OR 24 V DC MODELS
120/347 V AC INPUT



OVERVIEW			
INPUT VOLTAGE (V AC)	120 OR 347	OUTPUT POWER (W)	36 - 320
OUTPUT VOLTAGE (V DC)	6, 12 OR 24		

ORDERING GUIDE

SERIES	VOLTS (V DC)	WATTS (W)	VOLTS (V AC)	HEAD	LAMP/HEAD	LAMP
EBHZ	06 - 6 12 - 12 24 - 24	SEE MODEL RATING BELOW	BLANK - 120/347	1Z - SINGLE 2Z - DOUBLE	1 - SINGLE LAMP ASSEMBLY 2 - DOUBLE LAMP ASSEMBLY	SEE LAMP SELECTION BELOW



Scan for more details

RMHZ HAZARDOUS LOCATION REMOTE FIXTURE

CLASS I, DIVISION 1 & 2, GROUPS C, D
6, 12 OR 24 V DC MODELS
WALL, CEILING OR PENDANT MOUNT



OVERVIEW

LIGHT SOURCE	QUARTZ OR LED	OUTPUT VOLTAGE [V DC]	6, 12 OR 24
--------------	---------------	-----------------------	-------------

ORDERING GUIDE - LED

SERIES	HEAD	NBR OF LAMPS	VOLTS [V DC]	WATTS [W]	LAMP TYPE	MOUNTING	OPTIONS
RMHZ	1 - SINGLE 2 - DOUBLE (WITH J-BOX)	1 - SINGLE LAMP PER HEAD 2 - DOUBLE LAMP PER HEAD	06-24V 6- 24 OPERATIONAL	4W - 4	LR - LED	C - CEILING MOUNT	LGD - DIE CAST LENS GUARD
				5W - 5	LA - LED	P - PENDANT MOUNT	
			12-24V 12 - 24 OPERATIONAL	6W - 6	LA - LED	W - WALL MOUNT	
				7W - 7			



LED



HAZARDOUS
LOCATION



ICES
005



Scan for more details


NOTES

NOTES

NOTES



NOTES

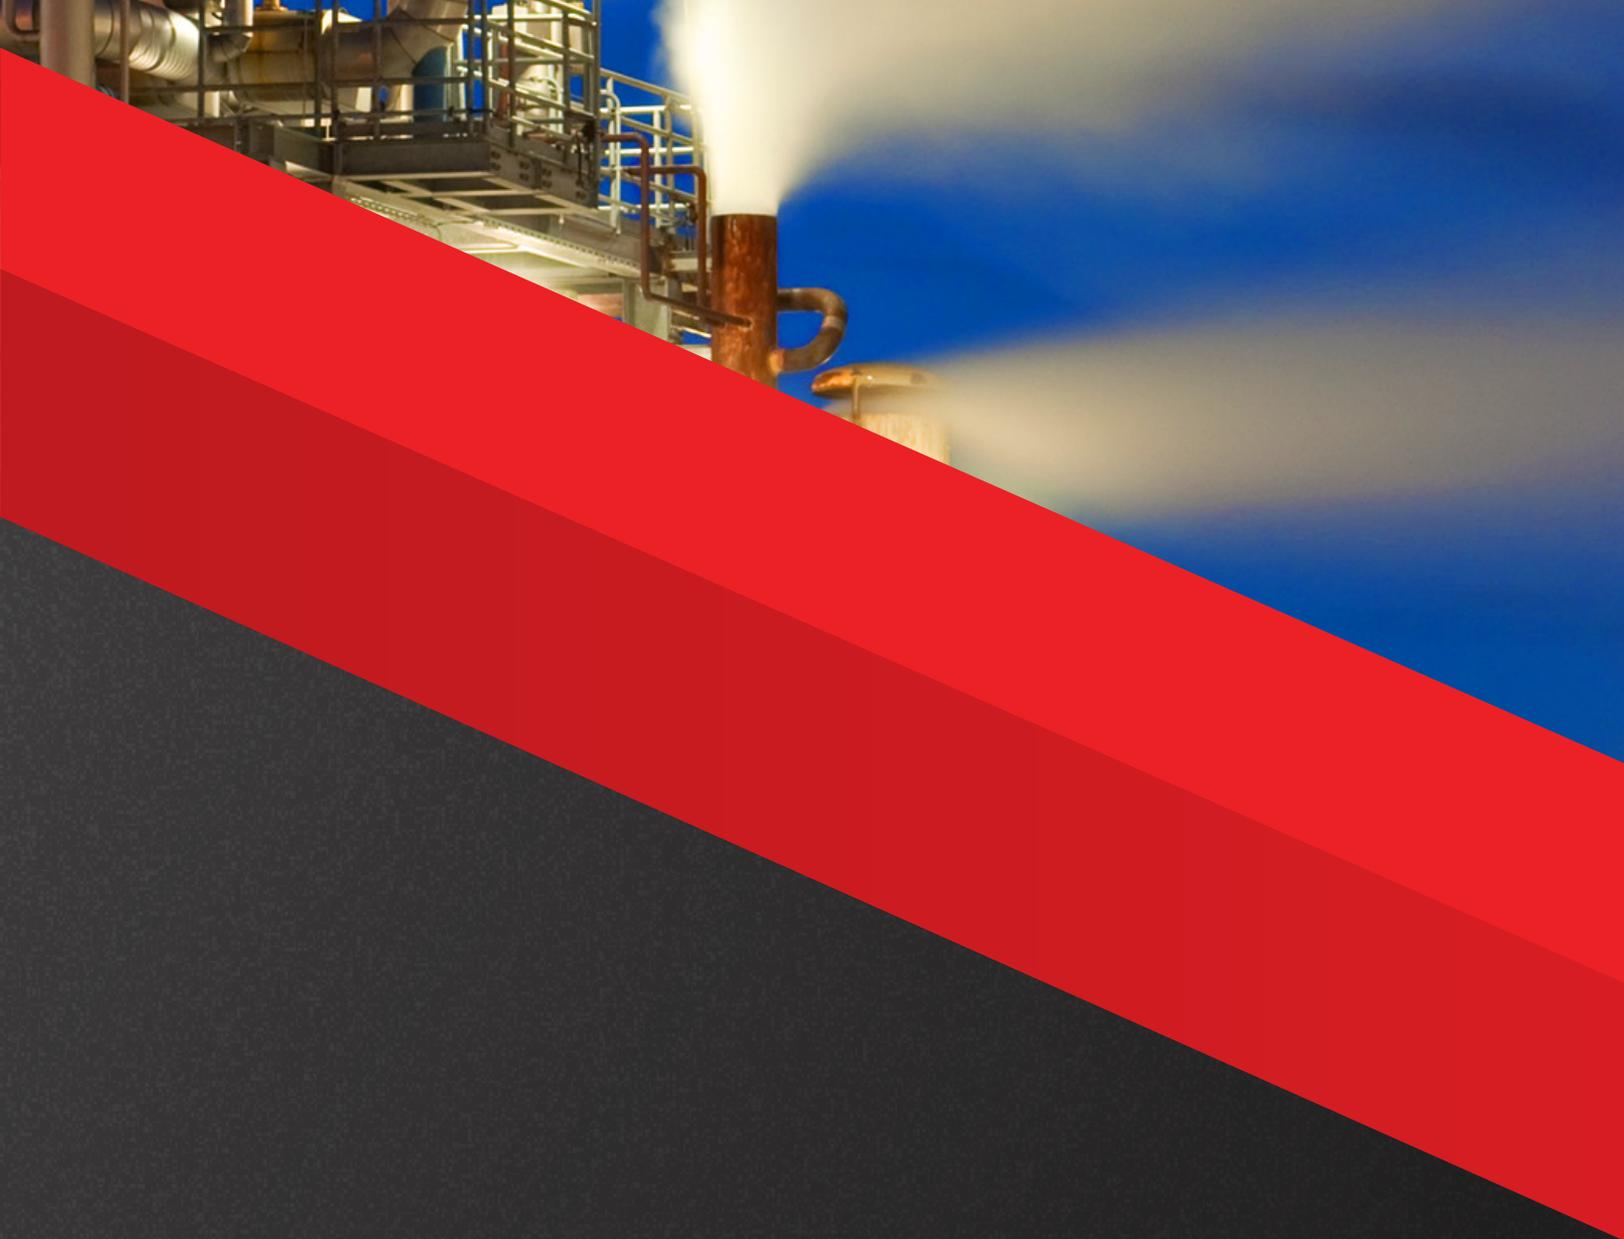

AimLite

2233 rue de l'Aviation,
Dorval QC
H9P2X6, CA

T 514 227-1288
TF 1 866 348-2374
f @ y aimlite.com

2024-10-09