

AI723

PHOTOLUMINESCENT RUNNING MAN SIGN ALUMINUM SIGN



FEATURES & SPECIFICATIONS

FEATURES

- Classic aluminum frame
- Zero maintenance - no bulbs, no battery replacement
- Screen printed image with photoluminescent background
- Non-toxic, non-radioactive
- Zero energy consumption and recyclable
- Thin, low profile construction
- Easily movable if egress path changes
- Temperature Rating: -28 to 79°C
- No disposal costs
- Consistent, uniform illumination
- 15.25 m (50 ft) rated, visibility, readability

INSTALLATION

- The ALUMINUM PHOTOLUMINESCENT RM is suitable for surface, flag, ceiling or stem mounting. Before installation it must be determined that there is a minimum of 54lx (5fc) of light on the face(s) of the sign at all times during building occupancy. Suitable for both high and low-level locations.

LISTED TO

- CAN/ULC-S572 (Standard for Photoluminescent and Self Luminous Exit Signs and Path Marking Systems)
- Meets NBC 2010/2015
- 54 lx (5fc) at 120 minute Listing


TECHNICAL INFORMATION

- Illumination: High Visibility Green
- Rated Viewing Distance: 15.25 meters (50 feet)
- Directional: Running Man with or without arrow
- Durability: Explosion-proof/ Suitable for Floor Proximity Installation

LIFE EXPECTANCY AND POWER REQUIREMENTS

- 25+ years. No additional electrical or mechanical source required.

DIMENSIONS

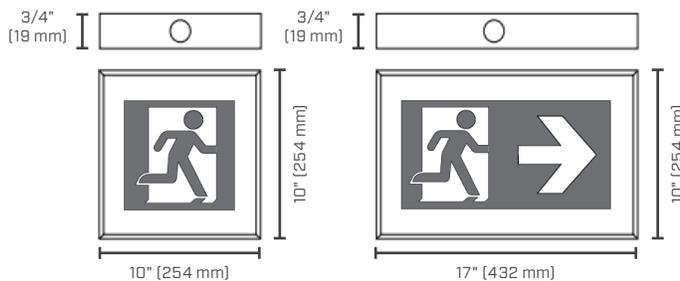

ORDERING GUIDE

MODEL	NO. OF FACES	DIRECTION
AI7230-L-SAF-B	SINGLE FACE	LEFT DIRECTION NO ARROW
AI7230-R-SAF-B	SINGLE FACE	RIGHT DIRECTION NO ARROW
AI7230-SAF-2-B	DOUBLE FACE	NO ARROWS
AI7231-L-A-SAF-B	SINGLE FACE	LEFT ARROW
AI7231-R-A-SAF-B	SINGLE FACE	RIGHT ARROW
AI7231-A-SAF-2-B	DOUBLE FACE	WITH ARROWS

Data is based upon tests performed in a controlled environment. Actual performance can vary depending on operating conditions. All products are subject to change or may be discontinued any time without notice.