

TRIANGULAR ALUMINUM EXIT

NRCan C860 Registered
LED 120/347 V AC Input



DESCRIPTION

The three sided, triangular design of the EXAL3 series of commercial extruded aluminum exit signs provides unique exit solutions. Ideal for large retail applications, pendant mounted directly over aisleways. Available in AC only, AC/DC and internally self-powered versions.

CIRCUITRY - AC & AC/DC

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 4.3W power consumption double or triple face
- Maximum emergency DC wattages as follows:
6 V DC = 2.7W 12 V DC = 3.0W 24 V DC = 5.4W

CIRCUITRY - SELF-POWERED

- LED ultra bright light source
- 120/347 V AC Input, field selectable
- 8.1W power consumption triple face
- High-performance, sealed Ni-Cad battery
- 90 minutes emergency duration
- Solid state transfer and battery charger


COMPLIANCE

- Compliant with CSA C22.2 #141-15

MECHANICAL

- Extruded aluminum construction
- Triple face for pendant mount and double face with backplate for wall mounting
- Slide in/out captive faceplate(s) and backplate for rapid and simplified installation
- Snap out directional chevrons/arrows
- Universal spider knockout pattern stamped into backplate for junction box mounting (double face wall mount model only)
- White powder coat finish standard

DIMENSIONS

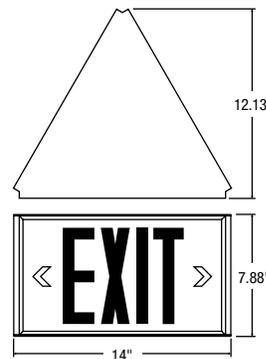

ORDERING GUIDE

Series	Nbr of faces	Mounting	Color	DC Voltage*
EXAL3	2 - Double face (wall) 3 - Triple face (pendant)	W - Wall mount P - Pendant mount	WHT - White	UNVDC - Universal DC backup voltage 6, 12 or 24 V DC selectable BAT - Self-powered for 90 minutes

*If AC only is required, select the UNVDC option and do not connect the DC wires when installing.